


FAG NJ2226-E-TVP2 + HJ2226-E参数

尺寸	d	130	mm	-	
	D	230	mm	-	
	B	64	mm	-	
	B ₁	11	mm	-	
	B ₂	21	mm	-	
	D ₁	201.2	mm	-	
	D _{a max}	216	mm	-	
	d ₁	164	mm	-	
	d _{a max}	151	mm	-	
	d _{a min}	144	mm	-	
	d _{c min}	168	mm	-	
	E	209.5	mm	-	
	F	153.5	mm	-	
	r _{1 min}	3	mm	-	
	r _{a max}	2.5	mm	-	
	r _{al max}	2.5	mm	-	
	r _{min}	3	mm	-	
	s	5.2	mm	距离中心位置的轴向偏移	
	说明		HJ2226-E		型号, L 型圈
	重量	m	10600	g	质量
m ₁		849	g	质量, L 型圈	
基本额定载荷	C _r	620000	N	基本额定动载荷, 径向	
	C _{0r}	730000	N	基本额定静载荷, 径向	
极限转速	n _G	3500	r/min	极限转速	
参考转速	n _B	2310	r/min	参考速度	
疲劳极限载荷	C _{ur}	118000	N	疲劳极限载荷, 径向	

FAG NJ2226-E-TVP2 + HJ2226-E图片

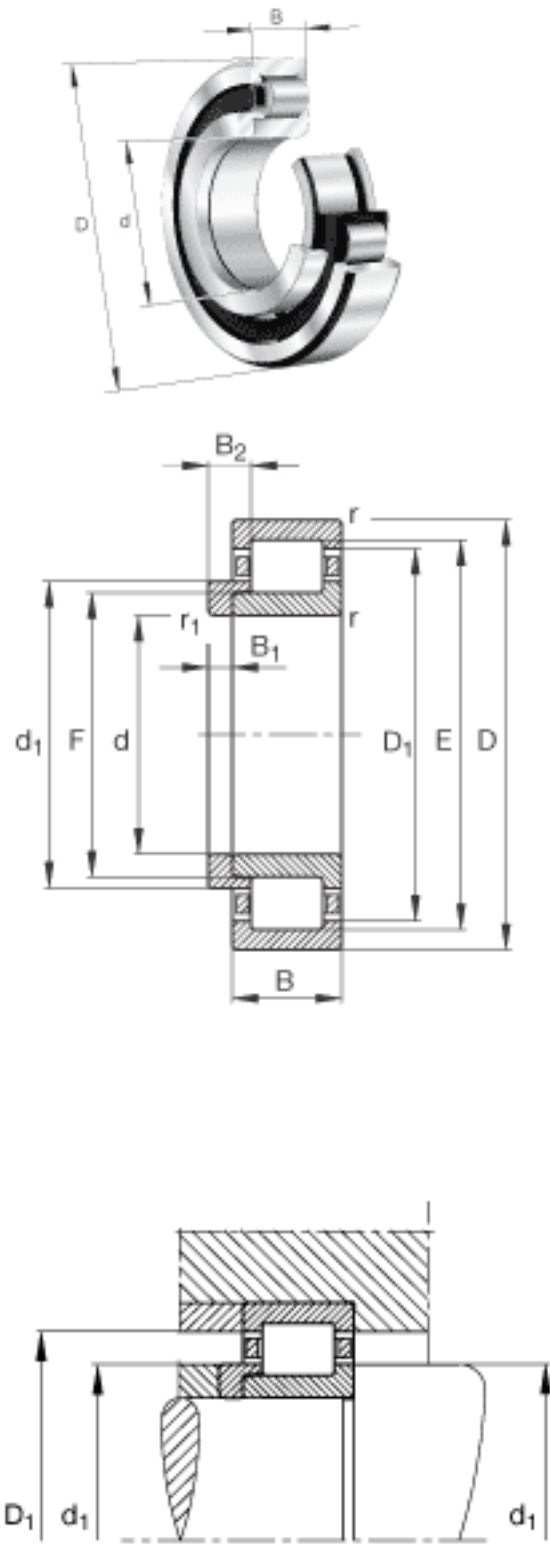

参考资料:<http://www.sozhou.com/p/06643d9e.html>

