

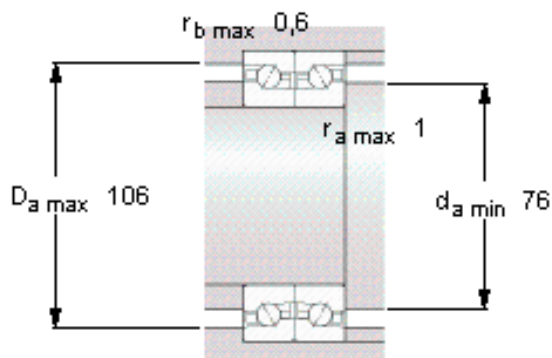


SKF BTM 70 ATN9/HCP4CDBA参数

主要尺寸	d	70	mm	-
	D	110	mm	-
	H	36	mm	-
基本额定载荷	C	27500	N	动载荷
	C_0	58500	N	静载荷
疲劳载荷极限	P_u	2450	N	-
可达转速	Grease	10900	r/min	-
	Oil-air	13000	r/min	-
重量	重量	1150	g	-
型号	型号	BTM 70 ATN9/HCP4CDBA	-	-

SKF BTM 70 ATN9/HCP4CDBA图片

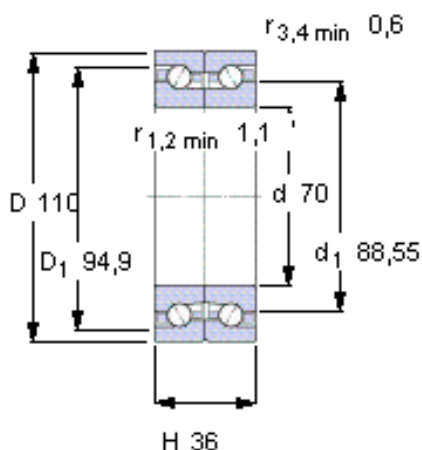

未安装时的预载荷 [N]

250

Reference grease quantity [cm²]




G_{ref} 11

Static axial stiffness [N/μm]

(guideline value)

252

参考资料:<http://www.sozhou.com/p/06a152bc.html>

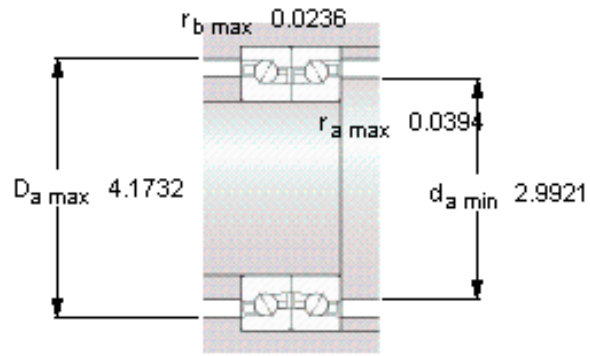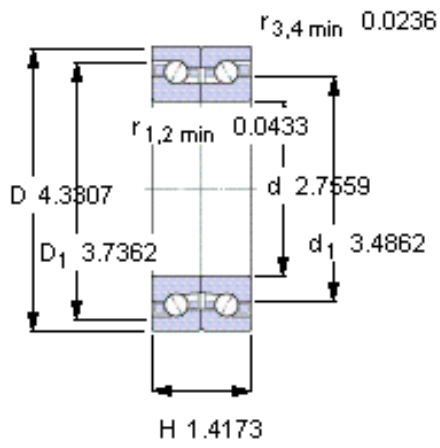

未安装时的预载荷 [N]

250

Reference grease quantity [cm³]

G_{ref} 11

Static axial stiffness [N/ μm]

(guideline value)

252