


## TIMKEN 19138/19267X参数

轴承类型	Bearing Type	TRB		-
子类	Bearing Subtype	TS		-
尺寸	Cone (Inner)	19138		内圈
	Cup (Outer)	19267X		外圈
额定载荷	d	34.9758	mm	内径
	D	68.0009	mm	外径
	T	16.0274	mm	宽度
	C1	50709.7	N	一百万转动态径向载荷
	C90	13166.7	N	九千万转动态径向载荷
	Ca90	10008.5	N	九千万转单列轴承动态轴向载荷
	C0	57826.9	N	静态额定载荷
尺寸	$K = 0.39 / \tan(\text{contact angle})$	1.31		系数
	$e = 1.5 * \tan(\text{contact angle})$	0.44		系数
	$Y = 0.4 / \tan(\text{contact angle})$	1.35		系数
几何结构系数	Cg	0.0694		几何系数
尺寸	B	16.5202	mm	内圈宽度
	R	1.524	mm	最大轴肩倒角半径
	db	42.418	mm	轴肩直径
	da	40.386	mm	轴肩直径
	Aa	1.27	mm	保持架（负值表示保持架超出内圈大端面）
	Ab	1.524	mm	保持架（负值表示保持架没超出内圈小端面）
	C	11.999	mm	外圈宽度
	r	1.524	mm	最大轴承座挡肩圆角半径
	Db	60.96	mm	轴承座挡肩直径
	Da	64.008	mm	轴承座挡肩直径
	a	-1.524	mm	有效中心位置
	重量	Assembly Weight	258.55	g

TIMKEN 19138/19267X图片





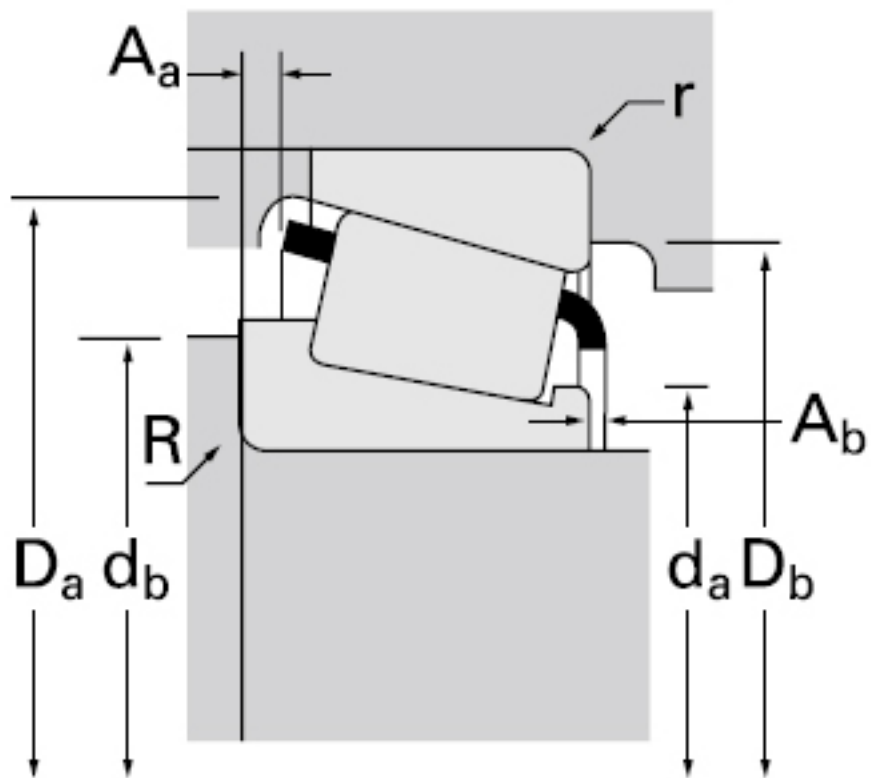

参考资料:<http://www.sozhou.com/p/07454d2e.html>

