


FAG NJ2318-E-TVP2 + HJ2318-E参数

| | | | | | |
|----------------|---------------------|--------|----------|-------------|----------|
| 尺寸 | d | 90 | mm | - | |
| | D | 190 | mm | - | |
| | B | 64 | mm | - | |
| | B ₁ | 12 | mm | - | |
| | B ₂ | 22 | mm | - | |
| | D ₁ | 161.6 | mm | - | |
| | D _{a max} | 176 | mm | - | |
| | d ₁ | 124 | mm | - | |
| | d _{a max} | 111 | mm | - | |
| | d _{a min} | 104 | mm | - | |
| | d _{c min} | 127 | mm | - | |
| | E | 169.5 | mm | - | |
| | F | 113.5 | mm | - | |
| | r _{1 min} | 3 | mm | - | |
| | r _{a max} | 2.5 | mm | - | |
| | r _{al max} | 2.5 | mm | - | |
| | r _{min} | 3 | mm | - | |
| | s | 5 | mm | 距离中心位置的轴向偏移 | |
| | 说明 | | HJ2318-E | | 型号, L 型圈 |
| | 重量 | m | 8190 | g | 质量 |
| m ₁ | | 669 | g | 质量, L 型圈 | |
| 基本额定载荷 | C _r | 510000 | N | 基本额定动载荷, 径向 | |
| | C _{0r} | 530000 | N | 基本额定静载荷, 径向 | |
| 极限转速 | n _G | 4250 | r/min | 极限转速 | |
| 参考转速 | n _B | 3050 | r/min | 参考速度 | |
| 疲劳极限载荷 | C _{ur} | 92000 | N | 疲劳极限载荷, 径向 | |

FAG NJ2318-E-TVP2 + HJ2318-E图片

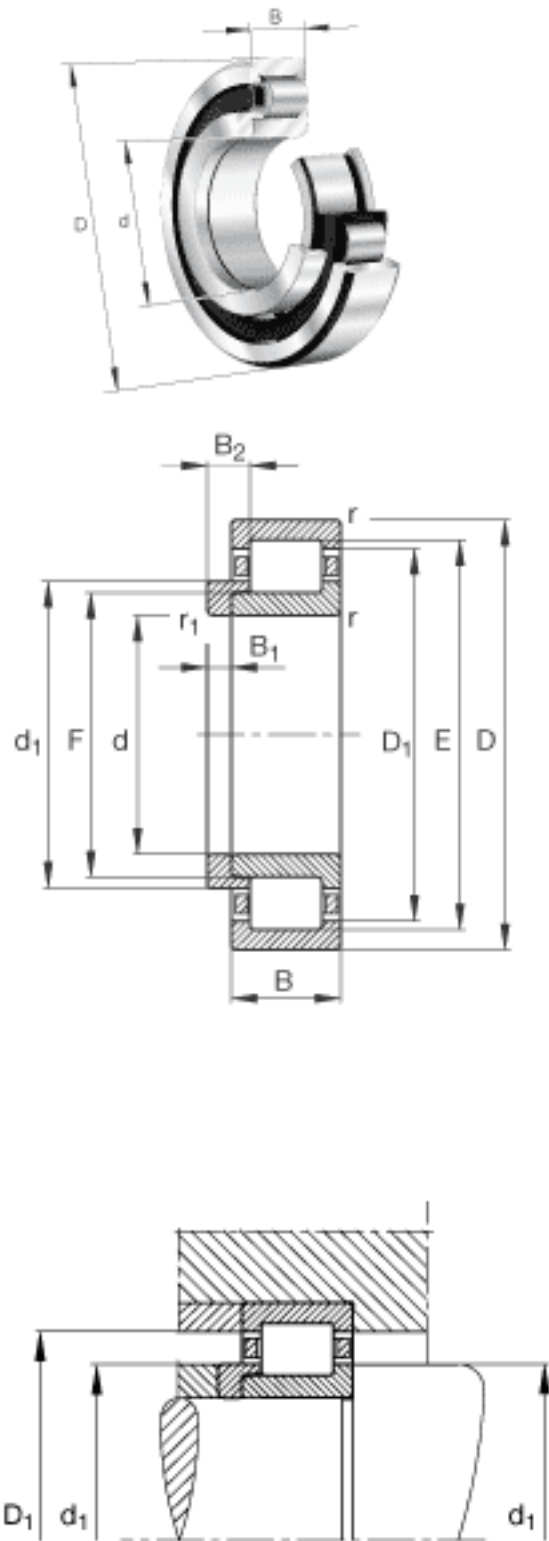

参考资料:<http://www.sozhou.com/p/0f226c15.html>

