


SKF BSA 204 C参数

主要尺寸	d	20	mm	-
	D	47	mm	-
	H	14	mm	-
基本额定载荷	C	22000	N	动载荷
	C_0	49000	N	静载荷
疲劳载荷极限	P_u	1800	N	-
可达转速	Grease lubrication	9500	r/min	-
	Oil-air lubrication	12000	r/min	-
重量	重量	120	g	-
型号	型号	BSA 204 C	-	-

SKF BSA 204 C图片

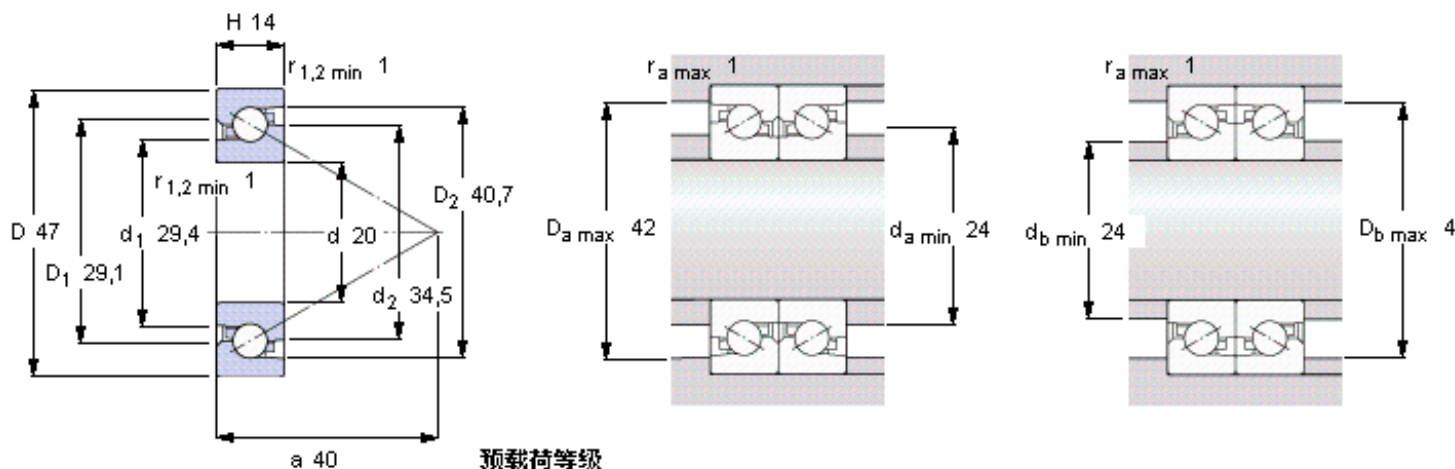

Preload¹⁾ [N]

Frictional moment¹⁾ [Nm]
(guideline value)

Static axial stiffness¹⁾ [N/μm]
(guideline value)

¹⁾ Values apply to unmounted bearing set with two bearings arranged back-to-back or face-to-face

预载荷等级

	A	B
Preload ¹⁾ [N]	1480	2960
Frictional moment ¹⁾ [Nm]	0,056	0,091

Static axial stiffness ¹⁾ [N/μm]	680	860
---	-----	-----




Max. axial load carrying capacity
(guideline value)

14,5

Reference grease quantity [cm³]

G_{ref} 1,2

参考资料: <http://www.sozhou.com/p/131b1389.html>

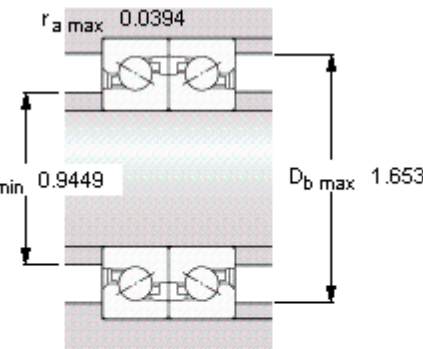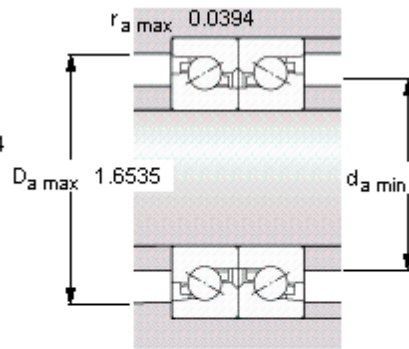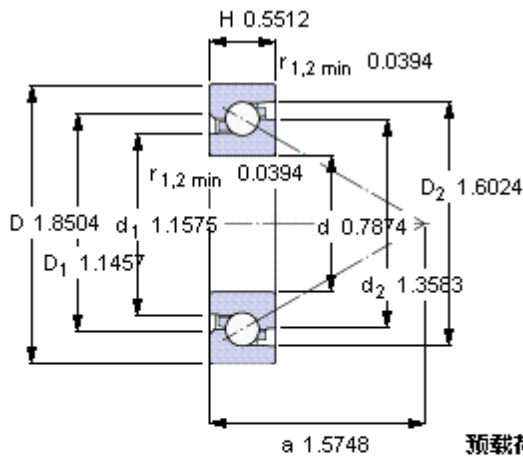

预载荷等级

Preload¹⁾ [N]

Frictional moment¹⁾ [Nm]

(guideline value)

Static axial stiffness¹⁾ [N/μm]

(guideline value)

A	B
1480	2960
0,056	0,091
680	860

Max. axial load carrying capacity

(guideline value)

14,5

Reference grease quantity [cm³]

G_{ref} 1,2

¹⁾ Values apply to unmounted bearing set with two bearings arranged back-to-back or face-to-face