


### FAG 29296-E-MB参数

尺寸	d	480	mm	-
	D	650	mm	-
	T	103	mm	-
	A	259	mm	-
	D <sub>1</sub>	556	mm	-
	D <sub>a max</sub>	603	mm	-
	D <sub>b min</sub>	662	mm	-
	d <sub>1</sub>	620	mm	-
	d <sub>a min</sub>	555	mm	-
	d <sub>b max</sub>	508	mm	-
	r <sub>a max</sub>	4	mm	-
	r <sub>min</sub>	5	mm	-
	T <sub>1</sub>	55	mm	-
	T <sub>2</sub>	37	mm	-
	T <sub>3</sub>	62	mm	-
	T <sub>4</sub>	71	mm	-
	重量	m	89500	g
基本额定载荷	C <sub>a</sub>	2700000	N	基本额定动载荷, 轴向
	C <sub>0a</sub>	14000000	N	基本额定静载荷, 轴向
极限转速	n <sub>G</sub>	900	r/min	极限转速
参考转速	n <sub>B</sub>	520	r/min	参考速度
疲劳极限载荷	C <sub>ua</sub>	700000	N	疲劳极限载荷, 轴向

### FAG 29296-E-MB图片

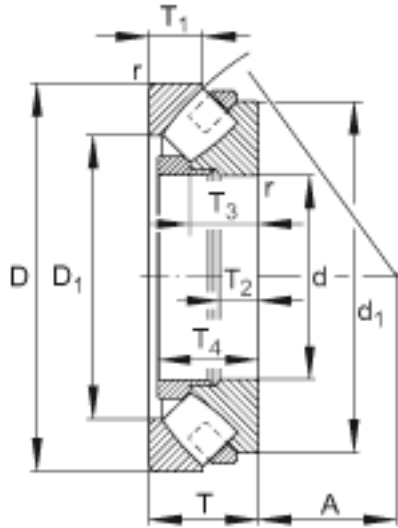

参考资料: <http://www.sozhou.com/p/15d8214d.html>