


### FAG NJ2218-E-TVP2参数

尺寸	$d_{c \min}$	116	mm	-
	F	107	mm	-
	$r_{1 \min}$	2	mm	-
	$r_{a \max}$	2	mm	-
	$r_{a1 \max}$	2	mm	-
	$r_{\min}$	2	mm	-
	s	2.5	mm	距离中心位置的轴向偏移
重量	m	3230	g	质量
基本额定载荷	$C_r$	285000	N	基本额定动载荷，径向
	$C_{0r}$	315000	N	基本额定静载荷，径向
极限转速	$n_G$	5200	r/min	极限转速
参考转速	$n_B$	3300	r/min	参考速度
疲劳极限载荷	$C_{ur}$	55000	N	疲劳极限载荷，径向
尺寸	d	90	mm	-
	D	160	mm	-
	B	40	mm	-
	$B_1$	9	mm	-
	$B_2$	15	mm	-
	$D_1$	139.7	mm	-
	$D_{a \max}$	149	mm	-
	$d_1$	114.3	mm	-
	$d_{a \max}$	105	mm	-
$d_{a \min}$	101	mm	-	

### FAG NJ2218-E-TVP2图片



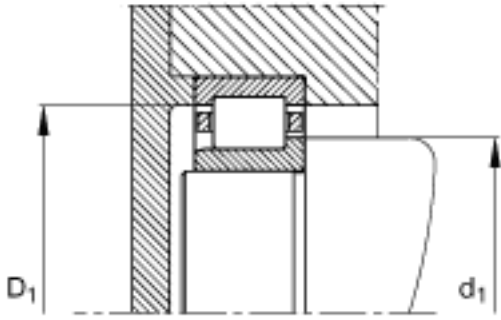

参考资料:<http://www.sozhou.com/p/20ec54d6.html>