


SKF BSA 205 C参数

主要尺寸	d	25	mm	-
	D	52	mm	-
	H	15	mm	-
基本额定载荷	C	22400	N	动载荷
	C_0	52000	N	静载荷
疲劳载荷极限	P_u	1930	N	-
可达转速	Grease lubrication	9000	r/min	-
	Oil-air lubrication	11000	r/min	-
重量	重量	150	g	-
型号	型号	BSA 205 C	-	-

SKF BSA 205 C图片

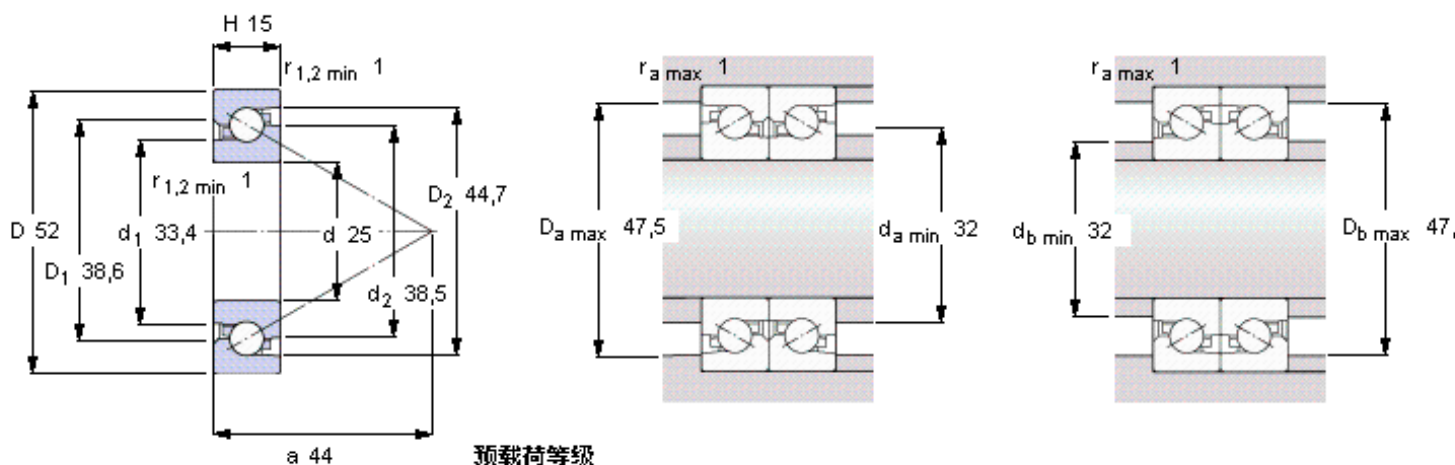

预载荷等级




	A	B
Preload ¹⁾ [N]	1580	3160
Frictional moment ¹⁾ [Nm] (guideline value)	0,069	0,12
Static axial stiffness ¹⁾ [N/μm] (guideline value)	725	925

Max. axial load carrying capacity
(guideline value)
18

Reference grease quantity [cm³]
 G_{ref} 1,5

¹⁾ Values apply to unmounted bearing set with two bearings arranged back-to-back or face-to-face

参考资料: <http://www.sozhou.com/p/23ab94f9.html>

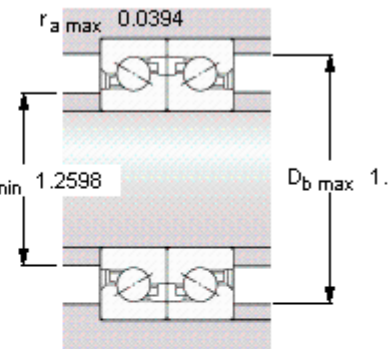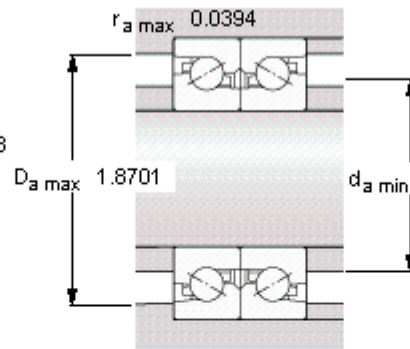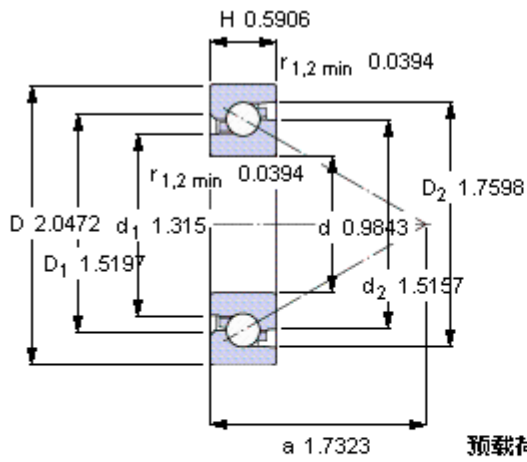

预载荷等级

Preload¹⁾ [N]

Frictional moment¹⁾ [Nm]

(guideline value)

Static axial stiffness¹⁾ [N/μm]

(guideline value)

A 1580 B 3160

0,069 0,12

725 925

Max. axial load carrying capacity

(guideline value)

18

Reference grease quantity [cm³]

G_{ref} 1,5

¹⁾ Values apply to unmounted bearing set with two bearings arranged back-to-back or face-to-face