


FAG NJ2206-E-TVP2 + HJ2206-E参数

| | | | | |
|--------|----------------------|----------|-------|-------------|
| 尺寸 | E | 55.5 | mm | - |
| | F | 37.5 | mm | - |
| | $r_{1 \text{ min}}$ | 0.6 | mm | - |
| | $r_{a \text{ max}}$ | 1 | mm | - |
| | $r_{a1 \text{ max}}$ | 0.6 | mm | - |
| | r_{min} | 1 | mm | - |
| | s | 1.6 | mm | 距离中心位置的轴向偏移 |
| 说明 | | HJ2206-E | | 型号, L 型圈 |
| 重量 | m | 261 | g | 质量 |
| | m_1 | 25 | g | 质量, L 型圈 |
| 基本额定载荷 | C_r | 58000 | N | 基本额定动载荷, 径向 |
| | C_{0r} | 50000 | N | 基本额定静载荷, 径向 |
| 极限转速 | n_G | 14200 | r/min | 极限转速 |
| 参考转速 | n_B | 8200 | r/min | 参考速度 |
| 疲劳极限载荷 | C_{ur} | 7800 | N | 疲劳极限载荷, 径向 |
| 尺寸 | d | 30 | mm | - |
| | D | 62 | mm | - |
| | B | 20 | mm | - |
| | B_1 | 4 | mm | - |
| | B_2 | 7.5 | mm | - |
| | D_1 | 52.5 | mm | - |
| | $D_{a \text{ max}}$ | 56 | mm | - |
| | d_1 | 41.3 | mm | - |
| | $d_{a \text{ max}}$ | 37 | mm | - |
| | $d_{a \text{ min}}$ | 34 | mm | - |
| | $d_{c \text{ min}}$ | 44 | mm | - |

FAG NJ2206-E-TVP2 + HJ2206-E图片

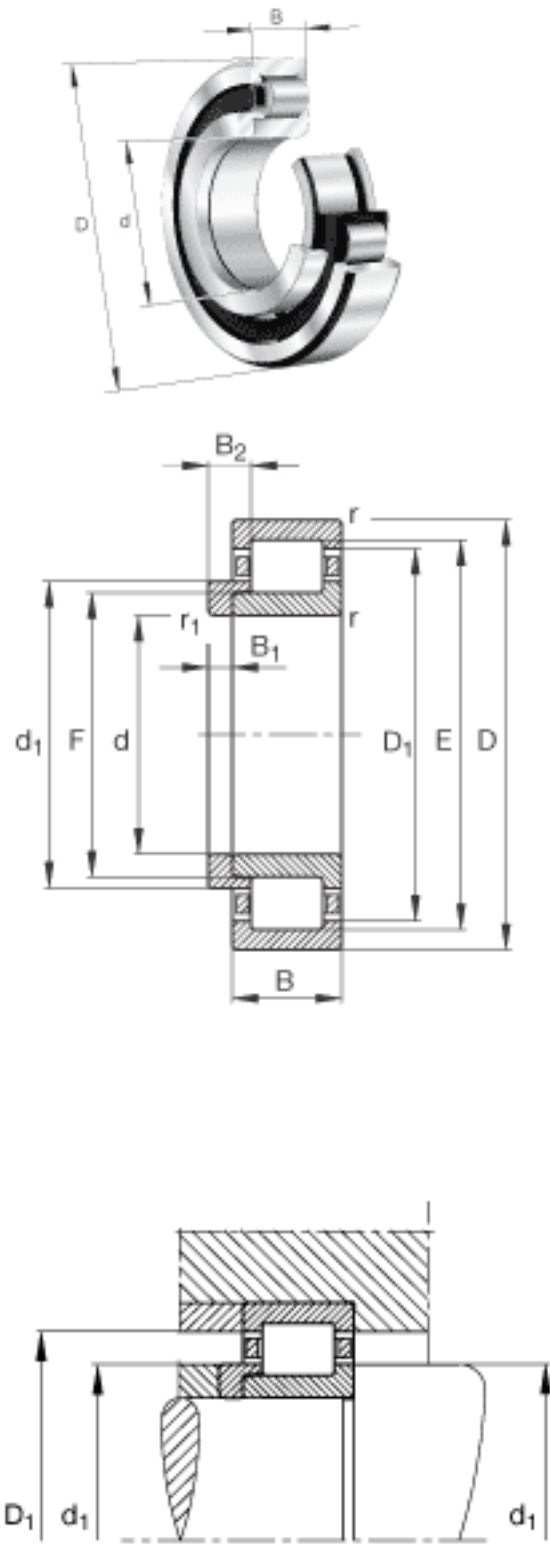

参考资料:<http://www.sozhou.com/p/2e30be28.html>

