


KOYO 51164参数

| | | | | |
|--------|-------|---------|-------|------|
| 主要尺寸 | SD | 320 | mm | 内径 |
| | D | 400 | mm | 外径 |
| | D1 | 396 | mm | - |
| | T | 63 | mm | 宽度 |
| | R | 2 | mm | (最小) |
| | SD1 | 324 | mm | 内径 |
| 型号 | ORDER | 51164 | | 型号 |
| 基本额定载荷 | C | 379000 | N | 动载荷 |
| | C0 | 1760000 | N | 静载荷 |
| 极限转速 | NG | 540 | 1/min | 脂润滑 |
| | NO | 810 | 1/min | 油润滑 |

KOYO 51164图片

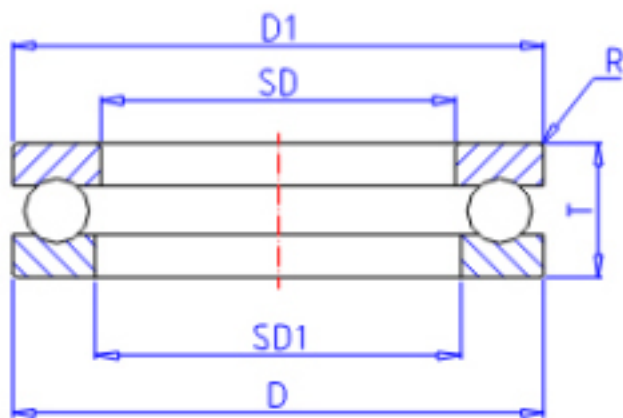

参考资料:<http://www.sozhou.com/p/318b3232.html>

