


SKF BSD 55120 C参数

主要尺寸	d	55	mm	-
	D	120	mm	-
	H	20	mm	-
基本额定载荷	C	69500	N	动载荷
	C_0	228000	N	静载荷
疲劳载荷极限	P_u	8500	N	-
可达转速	Grease lubrication	5000	r/min	-
	Oil-air lubrication	6000	r/min	-
重量	重量	1150	g	-
型号	型号	BSD 55120 C	-	-

SKF BSD 55120 C图片

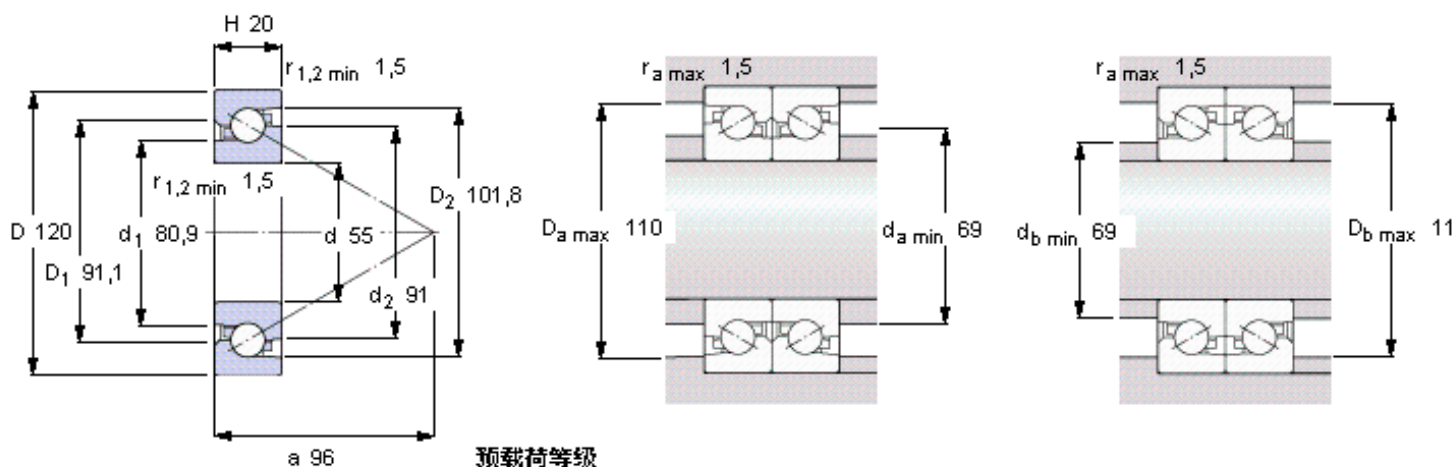

Preload¹⁾ [N]

Frictional moment¹⁾ [Nm]
(guideline value)

Static axial stiffness¹⁾ [N/μm]
(guideline value)

预载荷等级




	A	B
Preload ¹⁾ [N]	7300	14600
Frictional moment ¹⁾ [Nm]	0,72	1,26
Static axial stiffness ¹⁾ [N/μm]	1800	2300

Max. axial load carrying capacity
(guideline value)

Reference grease quantity [cm³]
 G_{ref} 7,5

¹⁾ Values apply to unmounted bearing set with two bearings arranged back-to-back or face-to-face

参考资料: <http://www.sozhou.com/p/320df8da.html>

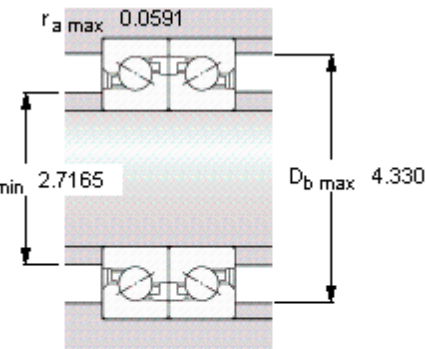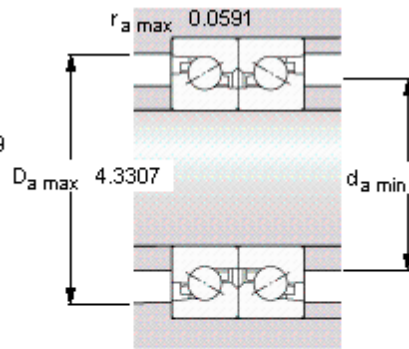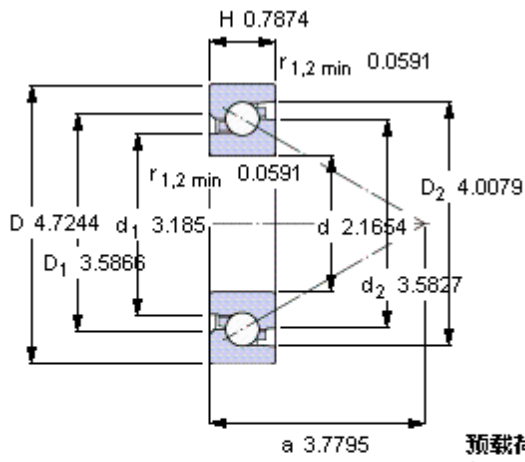

预载荷等级

Preload¹⁾ [N]

Frictional moment¹⁾ [Nm]

(guideline value)

Static axial stiffness¹⁾ [N/μm]

(guideline value)

	A	B
Preload ¹⁾ [N]	7300	14600
Frictional moment ¹⁾ [Nm]	0,72	1,26
Static axial stiffness ¹⁾ [N/μm]	1800	2300

Max. axial load carrying capacity

(guideline value)

130

Reference grease quantity [cm³]

G_{ref} 7,5

¹⁾ Values apply to unmounted bearing set with two bearings arranged back-to-back or face-to-face