


### FAG NUP218-E-TVP2参数

|        |                     |        |       |             |
|--------|---------------------|--------|-------|-------------|
| 尺寸     | d                   | 90     | mm    | -           |
|        | D                   | 160    | mm    | -           |
|        | B                   | 30     | mm    | -           |
|        | B <sub>3</sub>      | 5      | mm    | -           |
|        | D <sub>1</sub>      | 139.7  | mm    | -           |
|        | D <sub>a max</sub>  | 149    | mm    | -           |
|        | d <sub>1</sub>      | 114.3  | mm    | -           |
|        | d <sub>a max</sub>  | 105    | mm    | -           |
|        | d <sub>a min</sub>  | 101    | mm    | -           |
|        | d <sub>c min</sub>  | 116    | mm    | -           |
|        | F                   | 107    | mm    | -           |
|        | r <sub>1 min</sub>  | 2      | mm    | -           |
|        | r <sub>a max</sub>  | 2      | mm    | -           |
|        | r <sub>a1 max</sub> | 2      | mm    | -           |
|        | r <sub>min</sub>    | 2      | mm    | -           |
|        | s                   | 0      | mm    | 距离中心位置的轴向偏移 |
| 重量     | m                   | 2460   | g     | 质量          |
| 基本额定载荷 | C <sub>r</sub>      | 215000 | N     | 基本额定动载荷，径向  |
|        | C <sub>0r</sub>     | 217000 | N     | 基本额定静载荷，径向  |
| 极限转速   | n <sub>G</sub>      | 5200   | r/min | 极限转速        |
| 参考转速   | n <sub>B</sub>      | 3950   | r/min | 参考速度        |
| 疲劳极限载荷 | C <sub>ur</sub>     | 37000  | N     | 疲劳极限载荷，径向   |

### FAG NUP218-E-TVP2图片

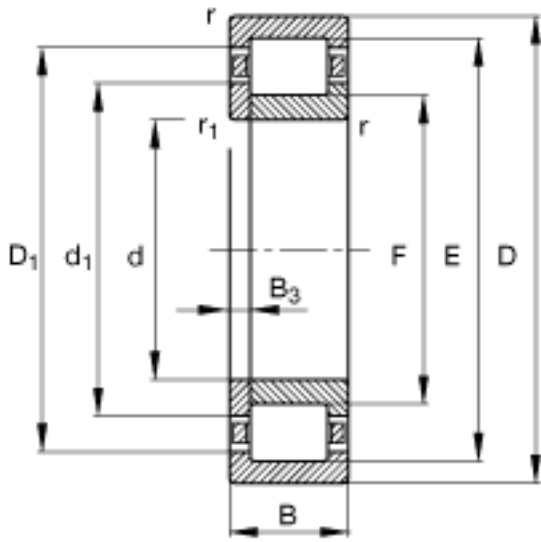

参考资料:<http://www.sozhou.com/p/36041df0.html>

