


### FAG NJ416-M1参数

尺寸	$r_{1 \text{ min}}$	3	mm	-
	$r_{a \text{ max}}$	2.5	mm	-
	$r_{al \text{ max}}$	2.5	mm	-
	$r_{\text{min}}$	3	mm	-
	s	4.6	mm	距离中心位置的轴向偏移
重量	m	8520	g	质量
基本额定载荷	$C_r$	395000	N	基本额定动载荷，径向
	$C_{0r}$	365000	N	基本额定静载荷，径向
极限转速	$n_G$	5400	r/min	极限转速
参考转速	$n_B$	3750	r/min	参考速度
疲劳极限载荷	$C_{ur}$	63000	N	疲劳极限载荷，径向
尺寸	d	80	mm	-
	D	200	mm	-
	B	48	mm	-
	$B_1$	13	mm	-
	$B_2$	22	mm	-
	$D_1$	159.7	mm	-
	$D_{a \text{ max}}$	184	mm	-
	$d_1$	121.8	mm	-
	$d_{a \text{ max}}$	109	mm	-
	$d_{a \text{ min}}$	96	mm	-
	$d_{c \text{ min}}$	124	mm	-
	F	110	mm	-

### FAG NJ416-M1图片



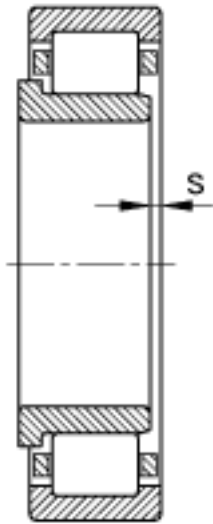

参考资料:<http://www.sozhou.com/p/3cc5faed.html>