


FAG NJ2214-E-TVP2 + HJ2214-E参数

尺寸	d	70	mm	-	
	D	125	mm	-	
	B	31	mm	-	
	B ₁	7	mm	-	
	B ₂	11.5	mm	-	
	D ₁	109.4	mm	-	
	D _{a max}	116	mm	-	
	d ₁	89.4	mm	-	
	d _{a max}	82	mm	-	
	d _{a min}	79	mm	-	
	d _{c min}	92	mm	-	
	E	113.5	mm	-	
	F	83.5	mm	-	
	r _{1 min}	1.5	mm	-	
	r _{a max}	1.5	mm	-	
	r _{al max}	1.5	mm	-	
	r _{min}	1.5	mm	-	
	s	1.6	mm	距离中心位置的轴向偏移	
	说明		HJ2214-E		型号, L 型圈
	重量	m	1540	g	质量
m ₁		157	g	质量, L 型圈	
基本额定载荷	C _r	185000	N	基本额定动载荷, 径向	
	C _{0r}	195000	N	基本额定静载荷, 径向	
极限转速	n _G	6800	r/min	极限转速	
参考转速	n _B	3900	r/min	参考速度	
疲劳极限载荷	C _{ur}	35500	N	疲劳极限载荷, 径向	

FAG NJ2214-E-TVP2 + HJ2214-E图片

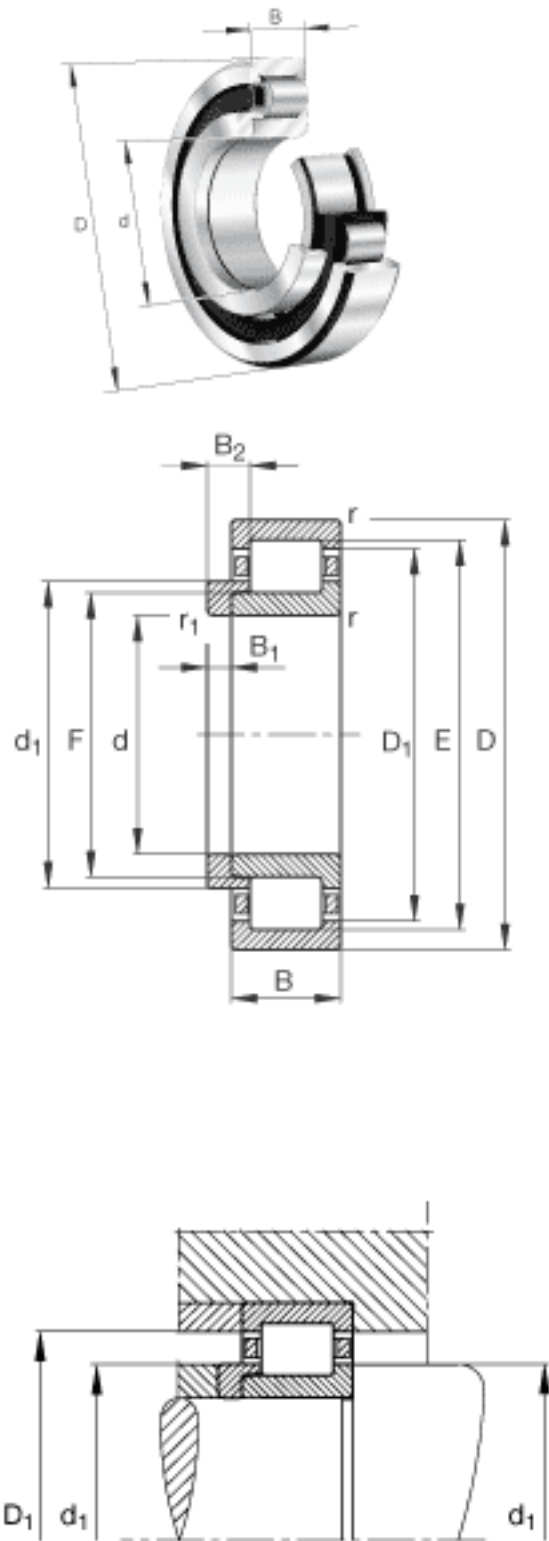

参考资料:<http://www.sozhou.com/p/3eaaeb19.html>

