


FAG NJ2219-E-TVP2 + HJ2219-E参数

尺寸	d	95	mm	-	
	D	170	mm	-	
	B	43	mm	-	
	B ₁	9	mm	-	
	B ₂	15.5	mm	-	
	D ₁	148.6	mm	-	
	D _{a max}	158	mm	-	
	d ₁	120.5	mm	-	
	d _{a max}	111	mm	-	
	d _{a min}	107	mm	-	
	d _{c min}	123	mm	-	
	E	154.5	mm	-	
	F	112.5	mm	-	
	r _{1 min}	2.1	mm	-	
	r _{a max}	2.1	mm	-	
	r _{al max}	2.1	mm	-	
	r _{min}	2.1	mm	-	
	s	2.2	mm	距离中心位置的轴向偏移	
	说明		HJ2219-E		型号, L 型圈
	重量	m	3980	g	质量
m ₁		366	g	质量, L 型圈	
基本额定载荷	C _r	340000	N	基本额定动载荷, 径向	
	C _{0r}	370000	N	基本额定静载荷, 径向	
极限转速	n _G	4850	r/min	极限转速	
参考转速	n _B	3100	r/min	参考速度	
疲劳极限载荷	C _{ur}	64000	N	疲劳极限载荷, 径向	

FAG NJ2219-E-TVP2 + HJ2219-E图片

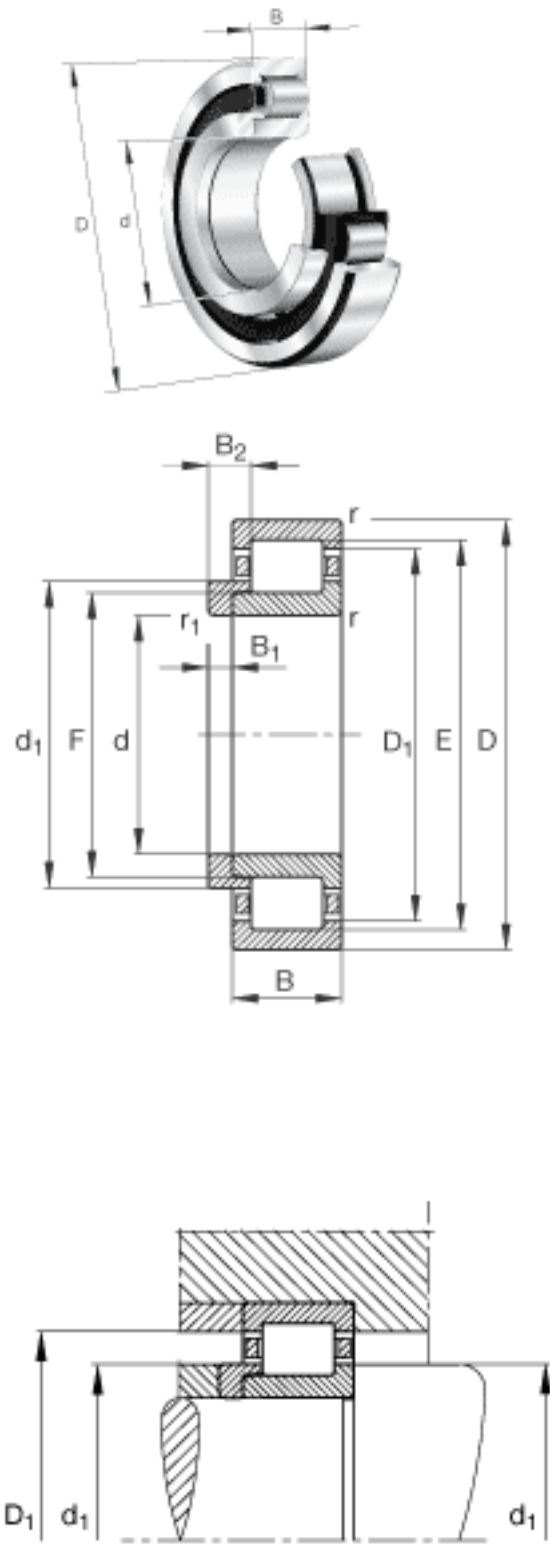

参考资料:<http://www.sozhou.com/p/3ff0225c.html>

