


NSK 54407U参数

基本额定载荷	CA	8950	kgf	动载荷	
	COA	15800	kgf	静载荷	
极限转速	GRE	1800	1/min	脂润滑	
	OIL	2800	1/min	油润滑	
尺寸	SD3	80.0	mm	-	
	D1	37	mm	-	
	D2	58	mm	-	
	D3	85	mm	-	
	T2	36.5	mm	-	
	T6	38.5	mm	-	
	T8	41.5	mm	-	
	B	14	mm	-	
	SB	10.0	mm	-	
	A1	18.5	mm	-	
	R	64	mm	-	
	安装尺寸	DA	58	mm	(最大)
		SRA	1.0	mm	(最大)
SRB		0.6	mm	(最大)	
重量	MASS	1830	g	重量	
型号	型号	54407U		-	
外形尺寸	SD2	25	mm	内径	
	SD	35	mm	外径	
	D	80	mm	宽度	
	T1	59	mm	-	
	T5	63.0	mm	-	
	T7	69	mm	-	
	SR	1.1	mm	(最小)	
	SR1	0.6	mm	(最小)	
	基本额定载荷	CAN	87500	N	动载荷
COAN		155000	N	静载荷	

NSK 54407U图片

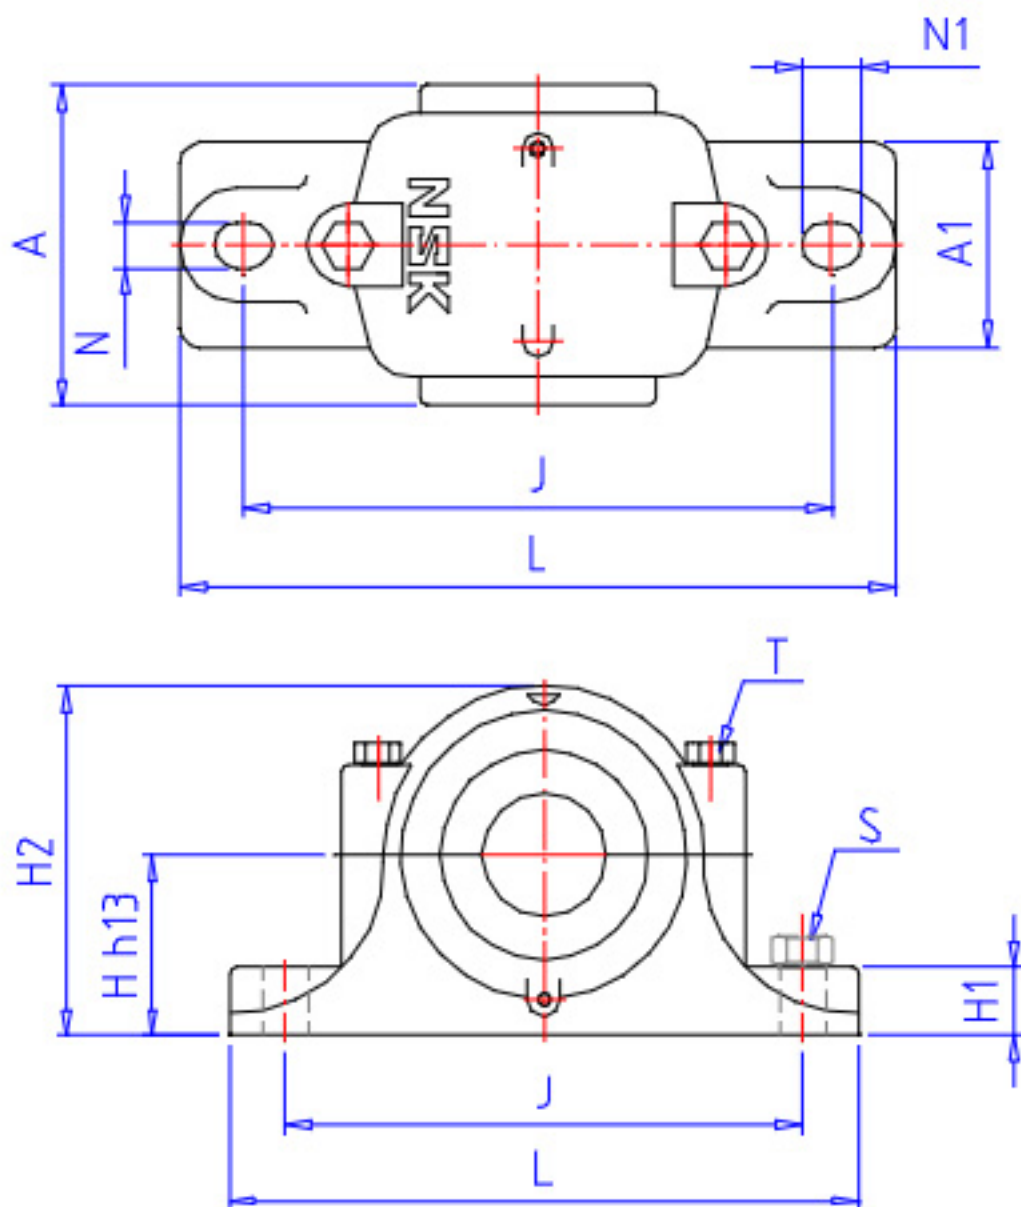

参考资料:<http://www.sozhou.com/p/4ad9b46d.html>

