
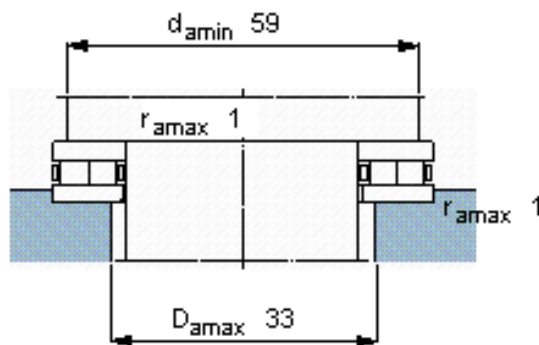


SKF 89306 TN参数


主要尺寸	d	30	mm	-
	D	60	mm	-
	H	18	mm	-
基本额定载荷	C	47500	N	动载荷
	C_0	160000	N	静载荷
疲劳载荷极限	P_u	16000	N	-
最小载荷系数	A	0.002	-	-
额定转速	额定转度	2600	r/min	-
	极限转速	5300	r/min	-
重量	重量	240	g	-
型号	完整轴承	89306 TN	-	-
	滚子和保持架推力组件	K 89306 TN	-	-

SKF 89306 TN图片

完整轴承

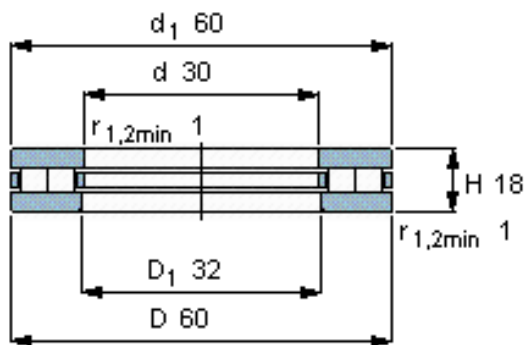


滚子和保持架推力组件

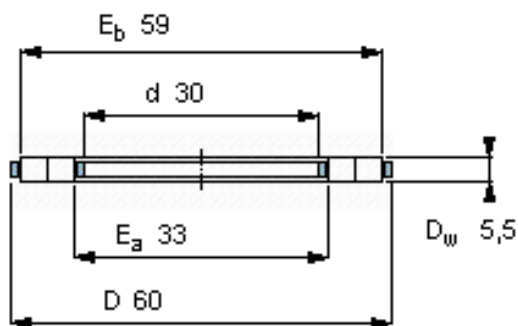

适宜的部件

轴垫圈
WS 89306



轴承座垫圈
GS 89306

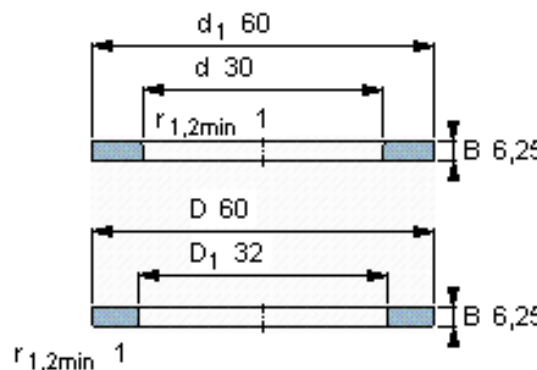


K 89306 TN

质量 kg 0,040

完整轴承

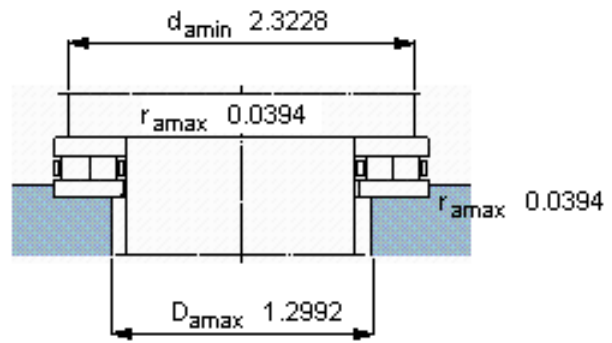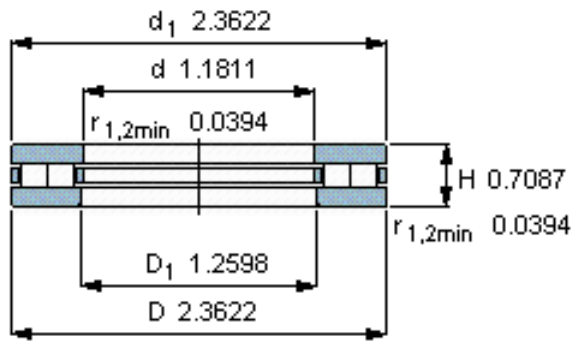

滚子和保持架推力组件

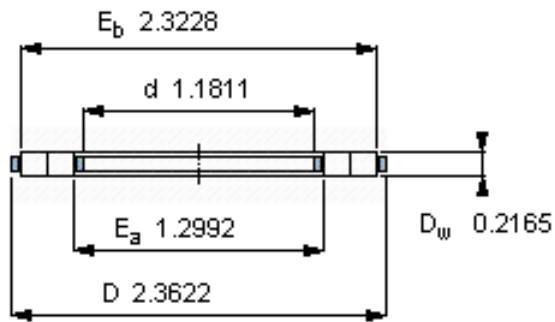


K 89306 TN

质量 kg 0,040

适宜的部件

轴垫圈
WS 89306

轴承座垫圈
GS 89306

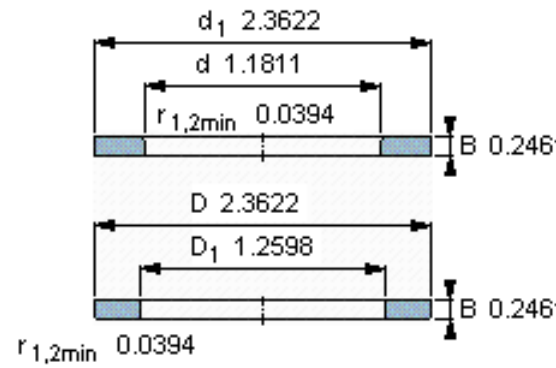

参考资料:<http://www.sozhou.com/p/4d6d42fd.html>