


NSK 54411U参数

外形尺寸	SD	55	mm	外径
	D	120	mm	宽度
	T1	87	mm	-
	T5	92.0	mm	-
	T7	101	mm	-
	SR	1.5	mm	(最小)
	SR1	0.6	mm	(最小)
	基本额定载荷	CAN	181000	N
COAN		350000	N	静载荷
CA		18500	kgf	动载荷
COA		35500	kgf	静载荷
极限转速	GRE	1200	1/min	脂润滑
	OIL	1800	1/min	油润滑
尺寸	SD3	120.0	mm	-
	D1	57	mm	-
	D2	88	mm	-
	D3	125	mm	-
	T2	53.5	mm	-
	T6	56.0	mm	-
	T8	60.5	mm	-
	B	20	mm	-
	SB	15.5	mm	-
	A1	22.5	mm	-
	R	90	mm	-
	安装尺寸	DA	88	mm
SRA		1.5	mm	(最大)
SRB		0.6	mm	(最大)
重量	MASS	5820	g	重量
型号	型号	54411U		-
外形尺寸	SD2	45	mm	内径

NSK 54411U图片

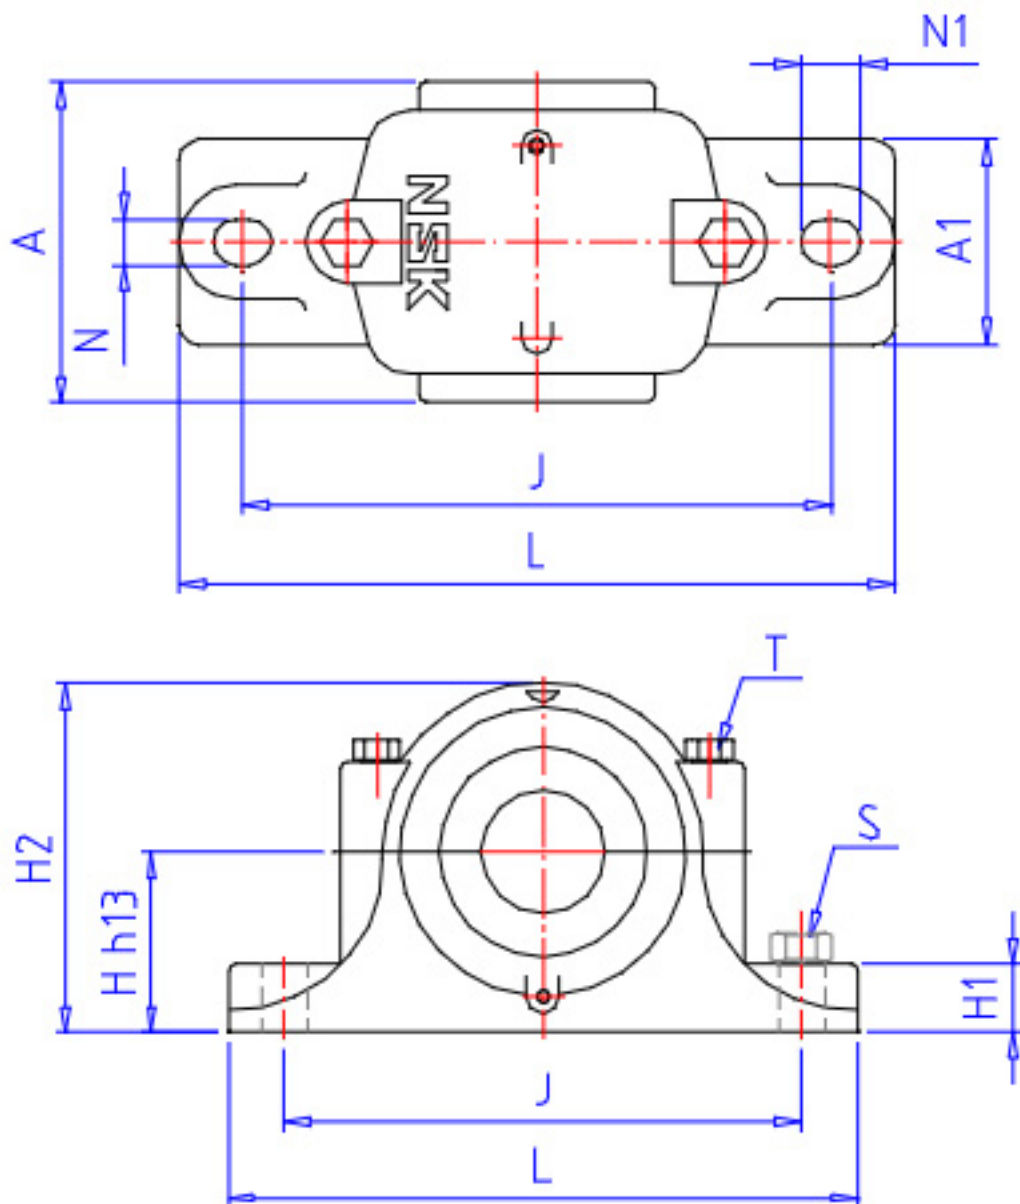

参考资料:<http://www.sozhou.com/p/4f78e604.html>

