


### KOYO 6228参数

|        |       |        |       |      |
|--------|-------|--------|-------|------|
| 主要尺寸   | SD    | 140    | mm    | 内径   |
|        | D     | 250    | mm    | 外径   |
|        | B     | 42     | mm    | 宽度   |
|        | R     | 3.0    | mm    | (最小) |
| 型号     | ORDER | 6228   |       | 型号   |
| 基本额定载荷 | C     | 166000 | N     | 动载荷  |
|        | C0    | 150000 | N     | 静载荷  |
| 极限转速   | NG    | 2400   | 1/min | 脂润滑  |
|        | NO    | 2900   | 1/min | 油润滑  |

### KOYO 6228图片

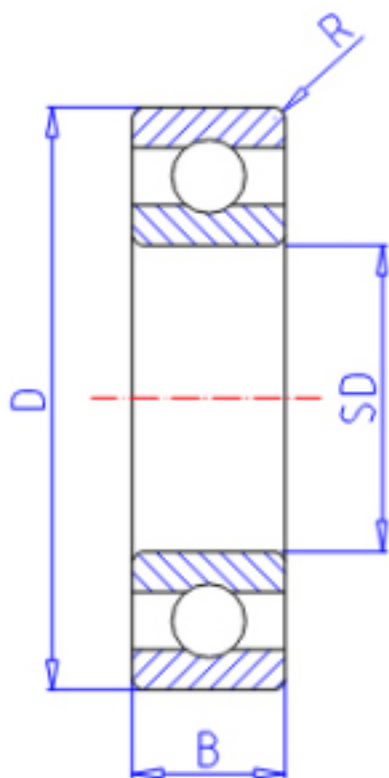

参考资料:<http://www.sozhou.com/p/4ff17017.html>

