


**FAG 292/1060-E-MB参数**

尺寸	d	1060	mm	-
	D	1400	mm	-
	T	206	mm	-
	A	566	mm	-
	D <sub>1</sub>	1208	mm	-
	D <sub>a max</sub>	1220	mm	-
	D <sub>b min</sub>	1422	mm	-
	d <sub>1</sub>	1335	mm	-
	d <sub>a min</sub>	1290	mm	-
	d <sub>b max</sub>	1111	mm	-
	r <sub>a max</sub>	8	mm	-
	r <sub>min</sub>	9.5	mm	-
	T <sub>1</sub>	108	mm	-
	T <sub>2</sub>	74	mm	-
	T <sub>3</sub>	124	mm	-
	T <sub>4</sub>	142	mm	-
	重量	m	792000	g
基本额定载荷	C <sub>a</sub>	10400000	N	基本额定动载荷, 轴向
	C <sub>0a</sub>	61000000	N	基本额定静载荷, 轴向
极限转速	n <sub>G</sub>	400	r/min	极限转速
参考转速	n <sub>B</sub>	224	r/min	参考速度
疲劳极限载荷	C <sub>ua</sub>	0	N	疲劳极限载荷, 轴向

**FAG 292/1060-E-MB图片**

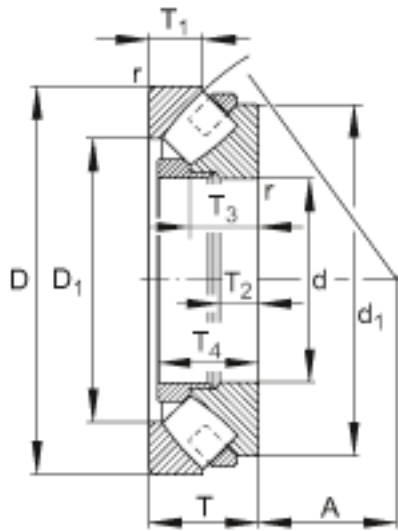

参考资料:<http://www.sozhou.com/p/5989263c.html>