


SKF NRT 260 A参数

主要尺寸	d	260	mm	-
	D	385	mm	-
	H	55	mm	-
基本额定载荷	C	108000	N	动载荷
	C_0	355000	N	静载荷
	C	95000	N	动载荷
	C_0	780000	N	静载荷
极限转速	Grease lubrication	130	r/min	-
	Oil lubrication	260	r/min	-
Guideline rotarytable diameter	Guideline rotary table diameter	630	mm	-
重量	重量	18500	g	-
型号	型号	NRT 260 A	-	-

SKF NRT 260 A图片

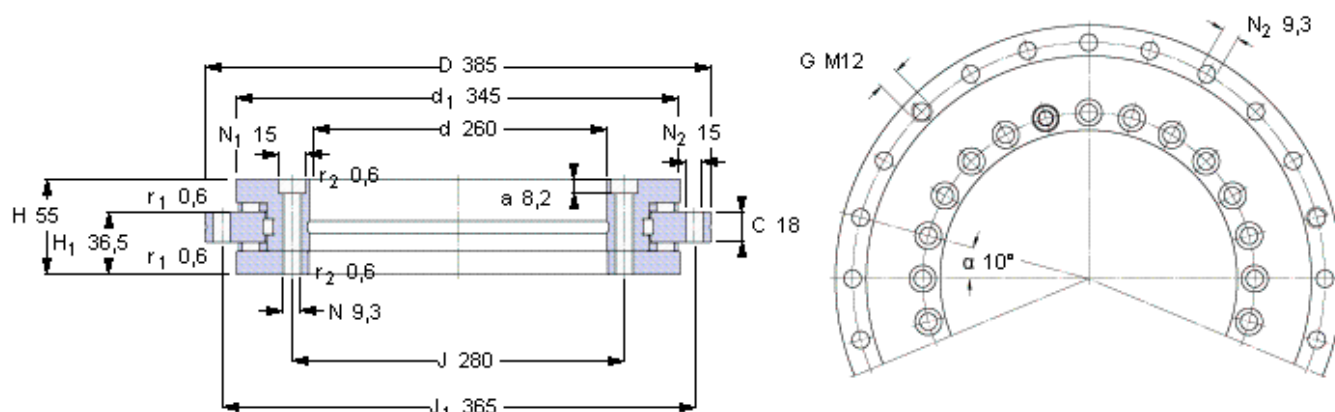

Axial preload [kN] 7,2
(average value)

Axial unloading force [kN] 16
(average value)

Frictional moment C_{RL} [Nm] 25
(guideline value)

Stiffness

(values refer to the roller set)

Axial [kN/ μ m] 14,5

Radial [kN/ μ m] 8,3

Movement [kNm/mrad] 150

Retaining bolts 2 x M8 , 180°

Removal threads G 3 x M12 , 120°

Required attachment bolts

Shaft (no. of bolts x pitch) 34 x 10°



with 2 positions omitted at 180° apart at retaining bolt positions

Housing (no. of bolts x pitch) 33 x 10°

with 3 positions omitted at 120° apart at removal thread positions

Recommended tightening torque for attachment bolts grade 10.9 [Nm]

34 (M8)

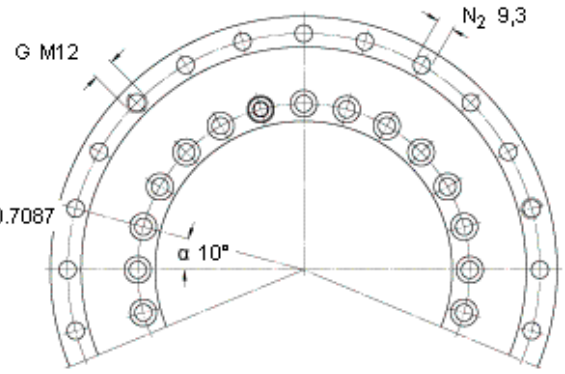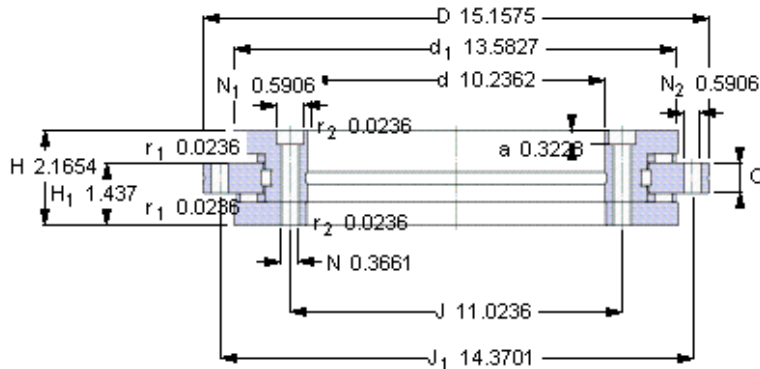

Axial preload [kN] 7,2
(average value)

Axial unloading force [kN] 16
(average value)

Frictional moment C_{RL} [Nm] 25
(guideline value)

Stiffness

(values refer to the roller set)

Axial [kN/ μ m] 14,5

Radial [kN/ μ m] 8,3

Movement [kNm/mrad] 150

Retaining bolts 2 x M8 , 180°

Removal threads G 3 x M12 , 120°

Required attachment bolts

Shaft (no. of bolts x pitch) 34 x 10°

with 2 positions omitted at 180° apart at retaining bolt positions

Housing (no. of bolts x pitch) 33 x 10°

with 3 positions omitted at 120° apart at removal thread positions

Recommended tightening torque for attachment bolts grade 10.9 [Nm]

1.3386 (M8)

参考资料: <http://www.sozhou.com/p/5b0ece7c.html>