


SKF BSA 210 C参数

主要尺寸	d	50	mm	-
	D	90	mm	-
	H	20	mm	-
基本额定载荷	C	46500	N	动载荷
	C_0	146000	N	静载荷
疲劳载荷极限	P_u	5400	N	-
可达转速	Grease lubrication	6000	r/min	-
	Oil-air lubrication	7000	r/min	-
重量	重量	560	g	-
型号	型号	BSA 210 C	-	-

SKF BSA 210 C图片

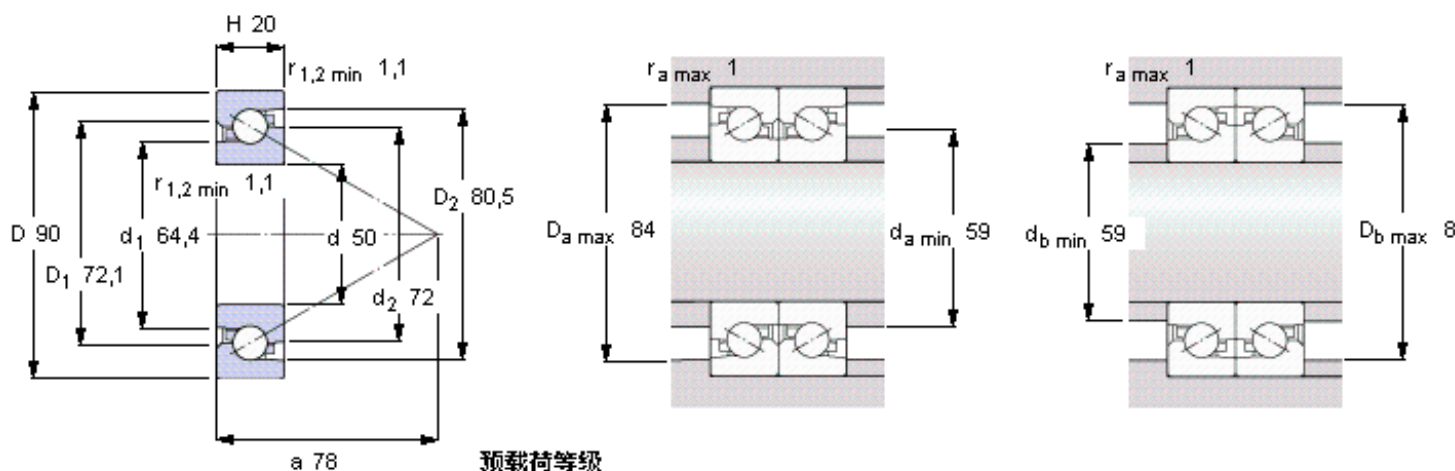

Preload¹⁾ [N]

Frictional moment¹⁾ [Nm]
(guideline value)

Static axial stiffness¹⁾ [N/μm]
(guideline value)

¹⁾ Values apply to unmounted bearing set with two bearings arranged back-to-back or face-to-face




预载荷等级

	A	B
Preload ¹⁾ [N]	4100	8200
Frictional moment ¹⁾ [Nm] (guideline value)	0,31	0,68
Static axial stiffness ¹⁾ [N/μm] (guideline value)	1410	1800

Max. axial load carrying capacity
(guideline value)

Reference grease quantity [cm³]
 G_{ref} 5,2

参考资料: <http://www.sozhou.com/p/634c42c2.html>

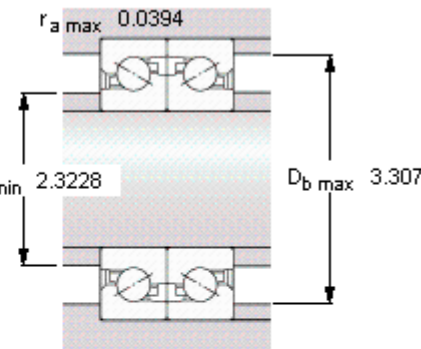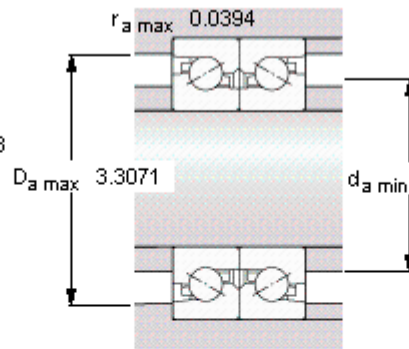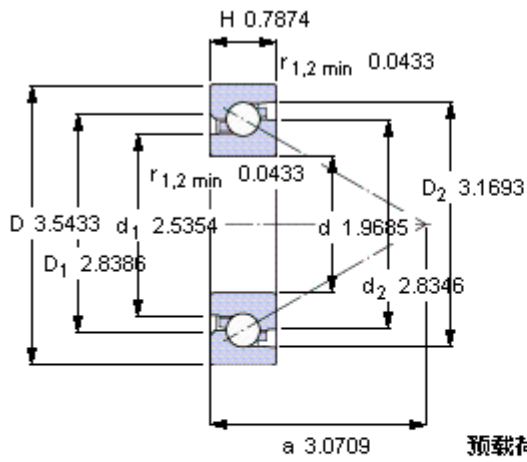

预载荷等级

Preload¹⁾ [N]

Frictional moment¹⁾ [Nm]

(guideline value)

Static axial stiffness¹⁾ [N/μm]

(guideline value)

A 4100 B 8200

0,31 0,68

1410 1800

Max. axial load carrying capacity

(guideline value)

42,5

Reference grease quantity [cm³]

G_{ref} 5,2

¹⁾ Values apply to unmounted bearing set with two bearings arranged back-to-back or face-to-face