
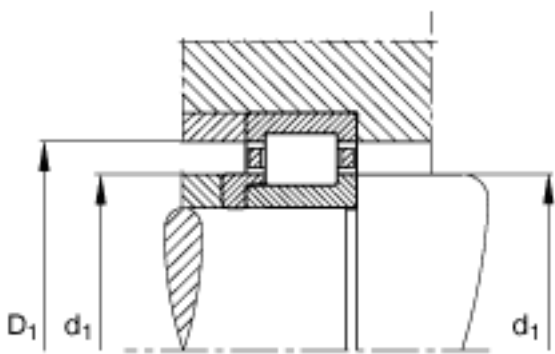


FAG NJ2326-E-M1 + HJ2326-E参数

基本额定载荷	$C_{0r}$	1220000	N	基本额定静载荷，径向	
极限转速	$n_G$	3700	r/min	极限转速	
尺寸	d	130	mm	-	
	D	280	mm	-	
	B	93	mm	-	
	$B_1$	14	mm	-	
	$B_2$	28	mm	-	
	$D_1$	235.2	mm	-	
	$D_{a \max}$	263	mm	-	
	$d_1$	181.7	mm	-	
	$r_{1 \min}$	4	mm	-	
	$r_{a \max}$	3	mm	-	
	$r_{al \max}$	3	mm	-	
	$r_{\min}$	4	mm	-	
		s	8.1	mm	距离中心位置的轴向偏移
	说明		HJ2326-E		型号，L 型圈
重量	m	29200	g	质量	
	$m_1$	1770	g	质量，L 型圈	
基本额定载荷	$C_r$	1080000	N	基本额定动载荷，径向	
尺寸	$d_{a \min}$	147	mm	-	
	$d_{c \min}$	184	mm	-	
	E	247	mm	-	
	F	167	mm	-	
参考转速	$n_B$	1780	r/min	参考速度	
尺寸	$d_{a \max}$	164	mm	-	
疲劳极限载荷	$C_{ur}$	195000	N	疲劳极限载荷，径向	

FAG NJ2326-E-M1 + HJ2326-E图片

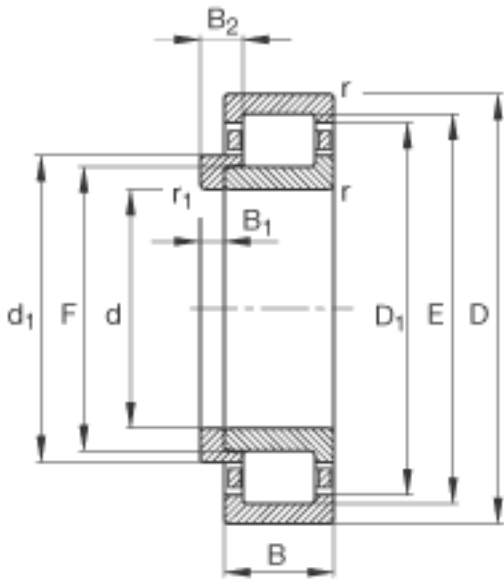

参考资料:<http://www.sozhou.com/p/665882f7.html>

