


FAG NJ2203-E-TVP2 + HJ2203-E参数

基本额定载荷	$C_r$	28500	N	基本额定动载荷, 径向
	$C_{0r}$	21900	N	基本额定静载荷, 径向
极限转速	$n_G$	22900	r/min	极限转速
参考转速	$n_B$	13300	r/min	参考速度
疲劳极限载荷	$C_{ur}$	3450	N	疲劳极限载荷, 径向
尺寸	$d$	17	mm	-
	$D$	40	mm	-
	$B$	16	mm	-
	$B_1$	3	mm	-
	$B_2$	6	mm	-
	$D_1$	32.5	mm	-
	$D_{a \max}$	36	mm	-
	$d_1$	24.7	mm	-
	$d_{a \max}$	21.5	mm	-
	$d_{a \min}$	21	mm	-
	$d_{c \min}$	26	mm	-
	$E$	35.1	mm	-
	$F$	22.1	mm	-
	$r_{1 \min}$	0.3	mm	-
	$r_{a \max}$	0.6	mm	-
	$r_{al \max}$	0.6	mm	-
	$r_{\min}$	0.6	mm	-
	$s$	1.7	mm	距离中心位置的轴向偏移
说明		HJ2203-E		型号, L 型圈
重量	$m$	53	g	质量
	$m_1$	8	g	质量, L 型圈

FAG NJ2203-E-TVP2 + HJ2203-E图片

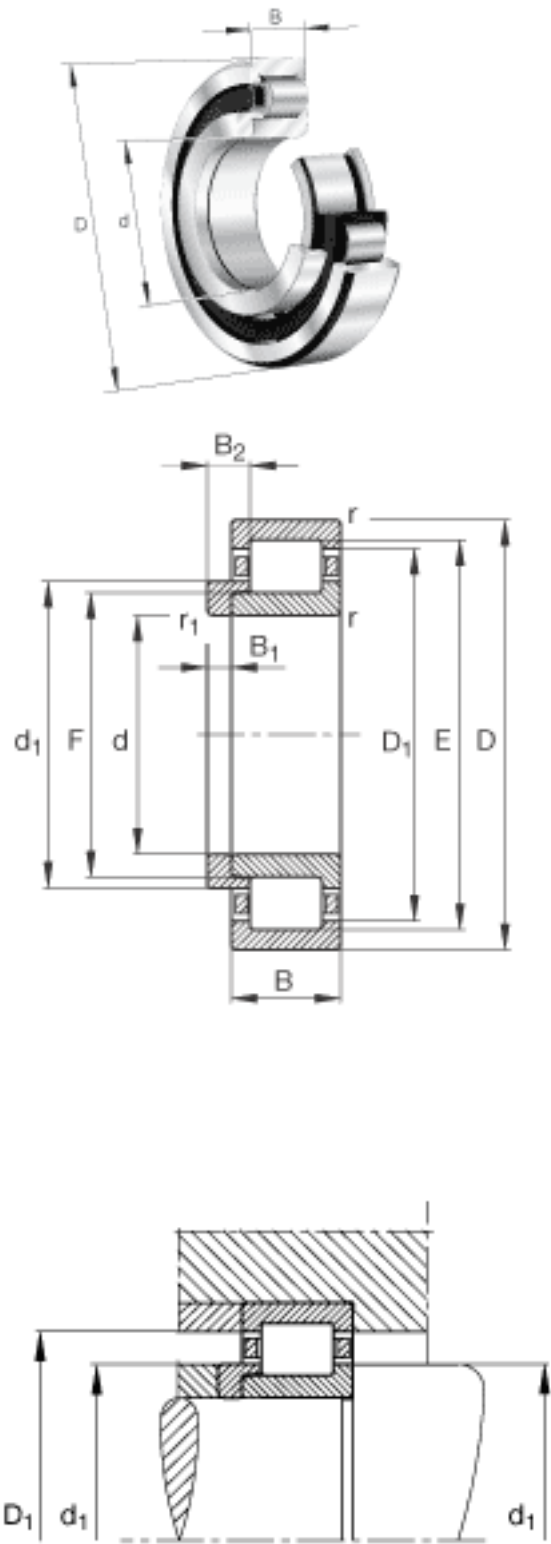

参考资料:<http://www.sozhou.com/p/6916c462.html>

