


**NTN NK29/20R+IR25x29x20参数**

型号	ORDER	NK29/20R+IR25x29x20		型号
尺寸	SD	25	mm	-
	D	38	mm	外径
	C	20	mm	宽度
	R	0.30	mm	-
	F	29	mm	-
基本额定载荷	CR	22200	N	动载荷
	COR	34000	N	静载荷
	CRF	2270	kgf	动载荷
	CORF	3450	kgf	静载荷
极限转速	LSG	9500	r/min	脂润滑
	LSO	14000	r/min	油润滑
重量	MASS	79	g	重量

**NTN NK29/20R+IR25x29x20图片**

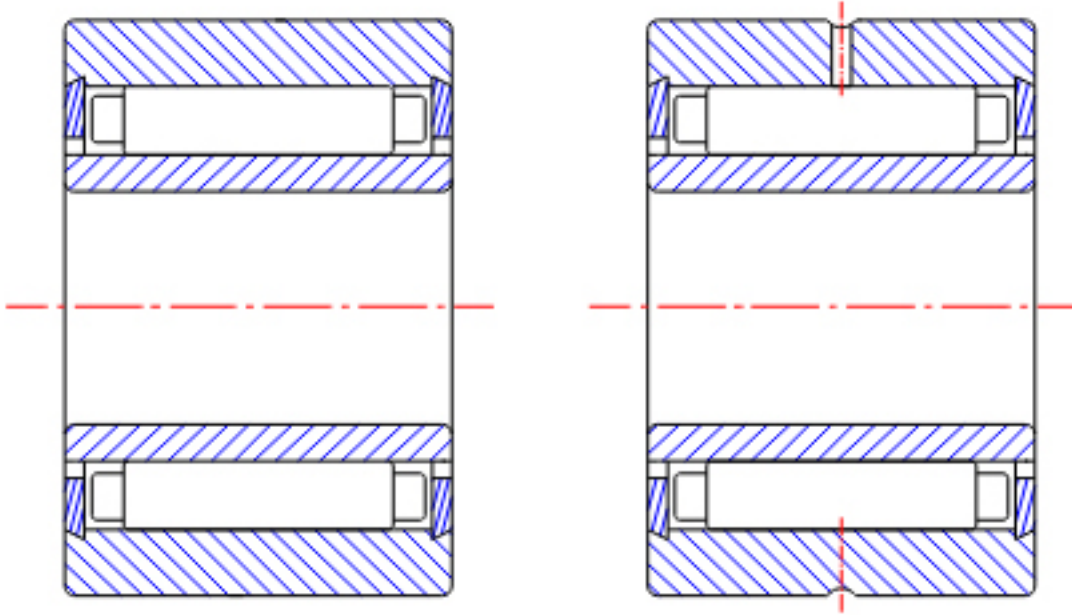

NK+IR  
(SD ≤ 9)

NA49  
(SD ≤ 9)

参考资料:<http://www.sozhou.com/p/6a63c186.html>



NA49...R ( $SD \geq 10$ )

NA49

NA48, NA59

NA69...R ( $SD \leq 30$ )

NK+IR ( $SD \geq 10$ )

NK, NK...R+IR

NA69...R

( $SD \geq 32$ )