

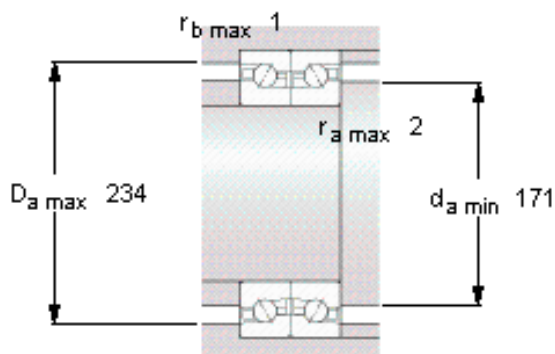


SKF BTM 160 BM/HCP4CDBA参数

主要尺寸	d	160	mm	-
	D	240	mm	-
	H	72	mm	-
基本额定载荷	C	114000	N	动载荷
	$C_0$	290000	N	静载荷
疲劳载荷极限	$P_u$	8800	N	-
可达转速	Grease	4300	r/min	-
	Oil-air	5100	r/min	-
重量	重量	11000	g	-
型号	型号	BTM 160 BM/HCP4CDBA	-	-

SKF BTM 160 BM/HCP4CDBA图片

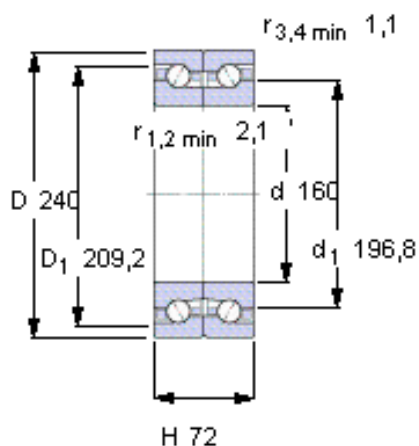

未安装时的预载荷 [N]

1500

Reference grease quantity [cm<sup>3</sup>]




G<sub>ref</sub> 94

Static axial stiffness [N/μm]

(guideline value)

979

参考资料: <http://www.sozhou.com/p/6d3d0234.html>

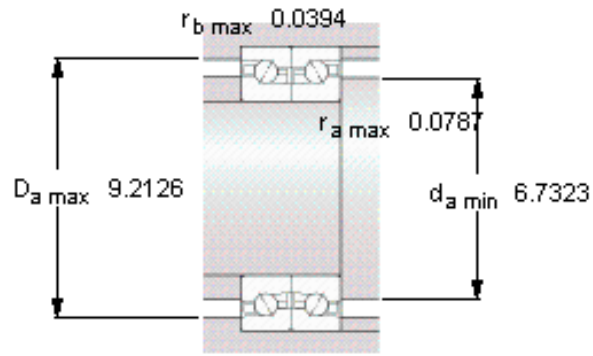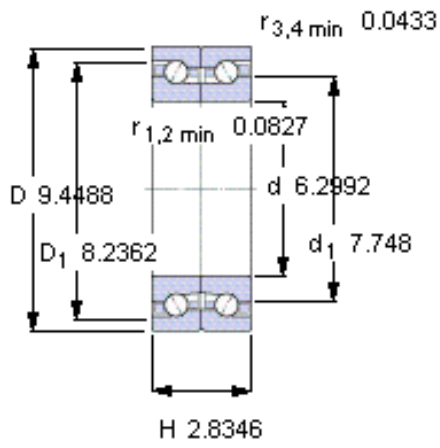

**未安装时的预载荷 [N]**

1500

**Reference grease quantity [cm<sup>3</sup>]**

$G_{\text{ref}}$  94

**Static axial stiffness [N/ $\mu\text{m}$ ]**

(guideline value)

979