
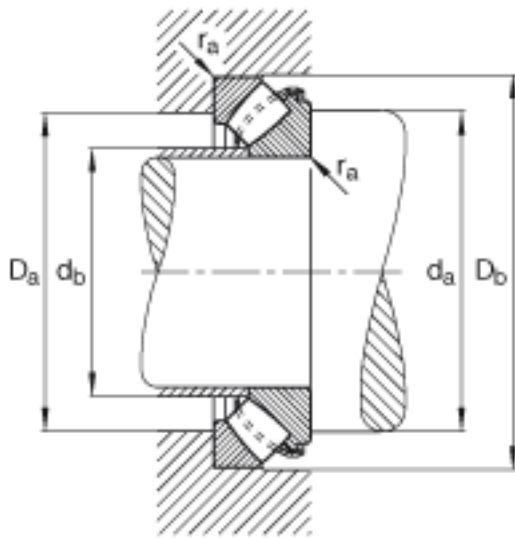


### FAG 29432-E1参数

重量	m	32100	g	质量
基本额定载荷	$C_a$	2240000	N	基本额定动载荷，轴向
尺寸	$d_{b \max}$	176	mm	-
	$d_{b1 \max}$	189	mm	-
	$r_{a \max}$	4	mm	-
	$T_3$	60.5	mm	-
	$r_{\min}$	5	mm	-
	$T_1$	45.5	mm	-
	$T_5$	84.5	mm	-
	d	160	mm	-
	D	320	mm	-
	T	95	mm	-
	A	99	mm	-
	$D_1$	223.5	mm	-
	$D_{a \max}$	271	mm	-
	$D_{b \min}$	326	mm	-
	$d_1$	283.5	mm	-
$d_{a \min}$	235	mm	-	
基本额定载荷	$C_{0a}$	6000000	N	基本额定静载荷，轴向
极限转速	$n_G$	2130	r/min	极限转速
参考转速	$n_B$	1090	r/min	参考速度
疲劳极限载荷	$C_{ua}$	620000	N	疲劳极限载荷，轴向

### FAG 29432-E1图片

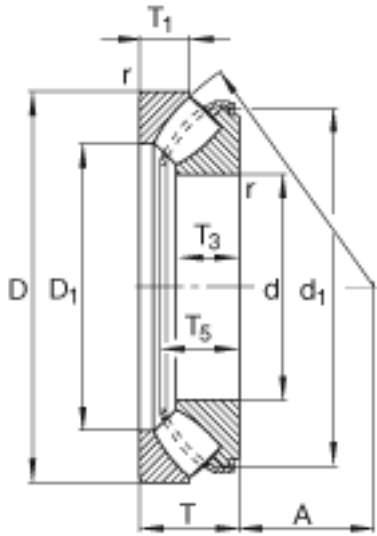

参考资料:<http://www.sozhou.com/p/7093fbc4.html>

