
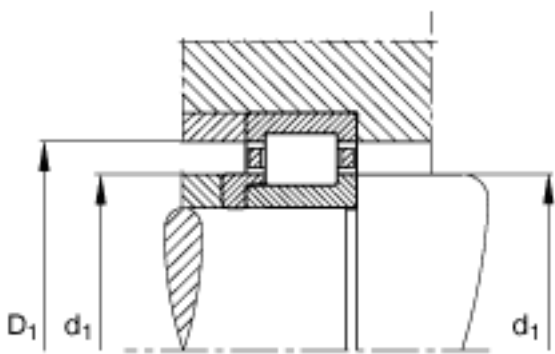


FAG NJ2304-E-TVP2 + HJ2304-E参数

尺寸	$r_{l \text{ min}}$	0.6	mm	-
	$r_{a \text{ max}}$	1	mm	-
	$r_{al \text{ max}}$	0.6	mm	-
	r_{min}	1.1	mm	-
	s	1.9	mm	距离中心位置的轴向偏移
说明		HJ2304-E		型号, L 型圈
重量	m	219	g	质量
	m_1	19	g	质量, L 型圈
基本额定载荷	C_r	49500	N	基本额定动载荷, 径向
	C_{0r}	39000	N	基本额定静载荷, 径向
极限转速	n_G	17200	r/min	极限转速
参考转速	n_B	9900	r/min	参考速度
疲劳极限载荷	C_{ur}	6100	N	疲劳极限载荷, 径向
尺寸	d	20	mm	-
	D	52	mm	-
	B	21	mm	-
	B_1	4	mm	-
	B_2	7.5	mm	-
	D_1	42.4	mm	-
	$D_{a \text{ max}}$	45	mm	-
	d_1	31.3	mm	-
	$d_{a \text{ max}}$	27	mm	-
	$d_{a \text{ min}}$	24	mm	-
	$d_{c \text{ min}}$	33	mm	-
	E	45.5	mm	-
	F	27.5	mm	-

FAG NJ2304-E-TVP2 + HJ2304-E图片

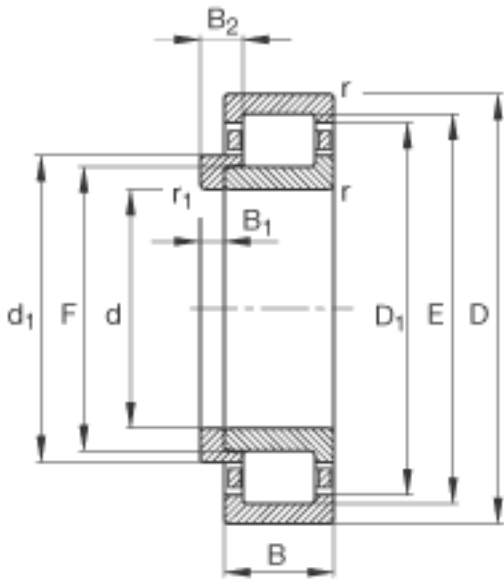

参考资料:<http://www.sozhou.com/p/719f5661.html>

