


FAG NJ2215-E-TVP2 + HJ2215-E参数

尺寸	F	88.5	mm	-
	$r_{1\ min}$	1.5	mm	-
	d	75	mm	-
	D	130	mm	-
	B	31	mm	-
	B_1	7	mm	-
	B_2	11.5	mm	-
	D_1	114.4	mm	-
	$D_{a\ max}$	121	mm	-
	d_1	94.4	mm	-
	$d_{a\ max}$	87	mm	-
	$d_{a\ min}$	84	mm	-
	$d_{c\ min}$	96	mm	-
	E	118.5	mm	-
重量	m_1	165	g	质量, L 型圈
基本额定载荷	C_r	192000	N	基本额定动载荷, 径向
	C_{0r}	208000	N	基本额定静载荷, 径向
极限转速	n_G	6500	r/min	极限转速
参考转速	n_B	3700	r/min	参考速度
疲劳极限载荷	C_{ur}	37500	N	疲劳极限载荷, 径向
尺寸	$r_{a\ max}$	1.5	mm	-
	$r_{al\ max}$	1.5	mm	-
	r_{min}	1.5	mm	-
	s	1.6	mm	距离中心位置的轴向偏移
说明		HJ2215-E		型号, L 型圈
重量	m	1640	g	质量

FAG NJ2215-E-TVP2 + HJ2215-E图片

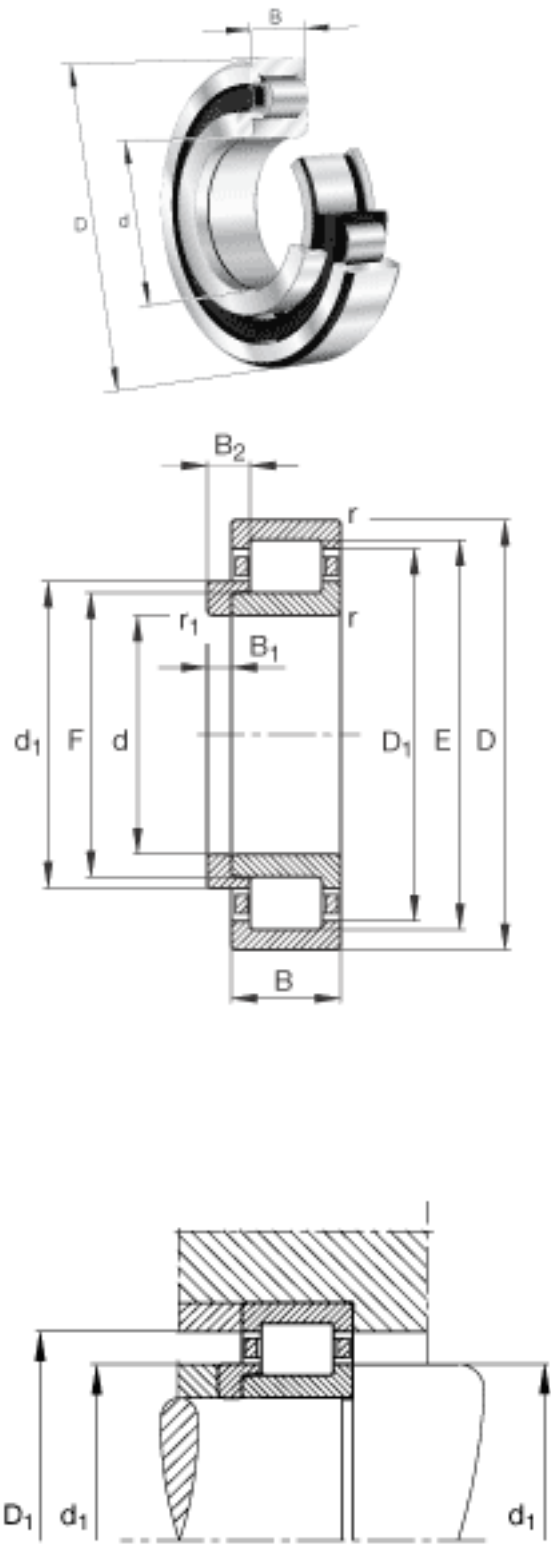

参考资料:<http://www.sozhou.com/p/86d1422c.html>

