
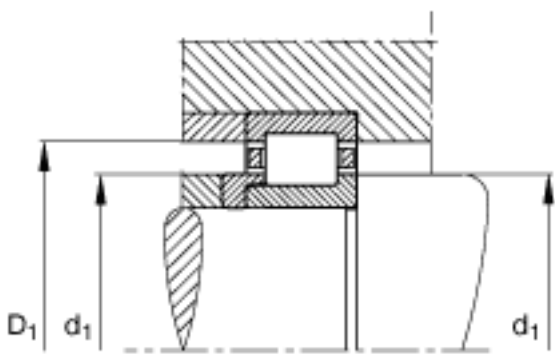


FAG NJ322-E-TVP2 + HJ322-E参数

尺寸	$D_1$	200.9	mm	-
	$D_{a\ max}$	226	mm	-
	$d_1$	155.6	mm	-
	$d_{a\ max}$	140	mm	-
	$d_{a\ min}$	124	mm	-
	$d_{c\ min}$	158	mm	-
	E	211	mm	-
	F	143	mm	-
	$r_{l\ min}$	3	mm	-
	$r_{a\ max}$	2.5	mm	-
	$r_{al\ max}$	2.5	mm	-
	$r_{min}$	3	mm	-
	s	1.3	mm	距离中心位置的轴向偏移
说明		HJ322-E		型号, L 型圈
重量	m	10300	g	质量
	$m_1$	1210	g	质量, L 型圈
基本额定载荷	$C_r$	495000	N	基本额定动载荷, 径向
	$C_{0r}$	475000	N	基本额定静载荷, 径向
极限转速	$n_G$	3350	r/min	极限转速
参考转速	$n_B$	3100	r/min	参考速度
疲劳极限载荷	$C_{ur}$	79000	N	疲劳极限载荷, 径向
尺寸	D	240	mm	-
	B	50	mm	-
	$B_1$	14	mm	-
	$B_2$	22	mm	-
	d	110	mm	-

FAG NJ322-E-TVP2 + HJ322-E图片

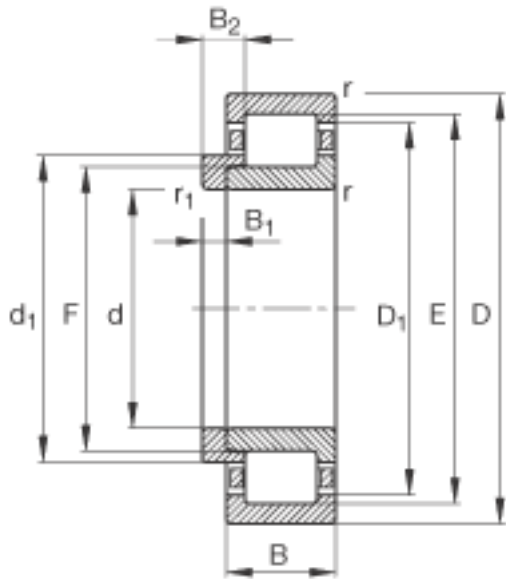

参考资料:<http://www.sozhou.com/p/8dcb4fcf.html>

