


### FAG NJ2326-E-M1 参数

|        |                     |         |       |             |
|--------|---------------------|---------|-------|-------------|
| 尺寸     | d                   | 130     | mm    | -           |
|        | D                   | 280     | mm    | -           |
|        | B                   | 93      | mm    | -           |
|        | B <sub>1</sub>      | 14      | mm    | -           |
|        | B <sub>2</sub>      | 28      | mm    | -           |
|        | D <sub>1</sub>      | 235.2   | mm    | -           |
|        | D <sub>a max</sub>  | 263     | mm    | -           |
|        | d <sub>1</sub>      | 181.7   | mm    | -           |
|        | d <sub>a max</sub>  | 164     | mm    | -           |
|        | d <sub>a min</sub>  | 147     | mm    | -           |
|        | d <sub>c min</sub>  | 184     | mm    | -           |
|        | F                   | 167     | mm    | -           |
|        | r <sub>1 min</sub>  | 4       | mm    | -           |
|        | r <sub>a max</sub>  | 3       | mm    | -           |
|        | r <sub>a1 max</sub> | 3       | mm    | -           |
|        | r <sub>min</sub>    | 4       | mm    | -           |
|        | s                   | 8.1     | mm    | 距离中心位置的轴向偏移 |
| 重量     | m                   | 29200   | g     | 质量          |
| 基本额定载荷 | C <sub>r</sub>      | 1080000 | N     | 基本额定动载荷，径向  |
|        | C <sub>0r</sub>     | 1220000 | N     | 基本额定静载荷，径向  |
| 极限转速   | n <sub>G</sub>      | 3700    | r/min | 极限转速        |
| 参考转速   | n <sub>B</sub>      | 1780    | r/min | 参考速度        |
| 疲劳极限载荷 | C <sub>ur</sub>     | 195000  | N     | 疲劳极限载荷，径向   |

### FAG NJ2326-E-M1 图片



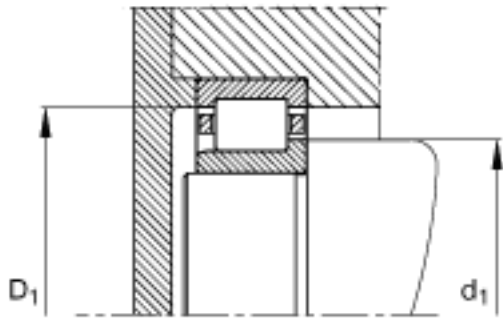

参考资料:<http://www.sozhou.com/p/96b8cea6.html>