
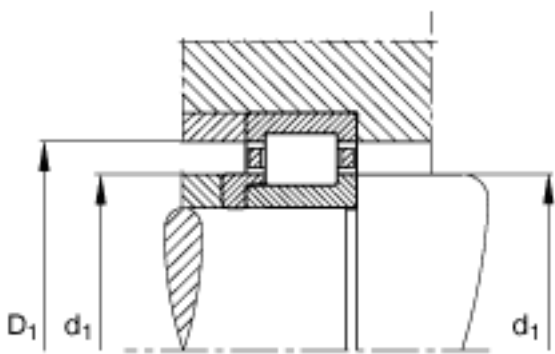


FAG NJ308-E-TVP2 + HJ308-E参数

重量	m	674	g	质量
	m_1	87	g	质量, L 型圈
基本额定载荷	C_r	96000	N	基本额定动载荷, 径向
	C_{0r}	79000	N	基本额定静载荷, 径向
极限转速	n_G	9500	r/min	极限转速
参考转速	n_B	7300	r/min	参考速度
疲劳极限载荷	C_{ur}	13500	N	疲劳极限载荷, 径向
尺寸	d	40	mm	-
	D	90	mm	-
	B	23	mm	-
	B_1	7	mm	-
	B_2	11	mm	-
	D_1	75.9	mm	-
	$D_{a \max}$	81	mm	-
	d_1	57.6	mm	-
	$d_{a \max}$	51	mm	-
	$d_{a \min}$	49	mm	-
	$d_{c \min}$	60	mm	-
	E	80	mm	-
	F	52	mm	-
	$r_{1 \min}$	1.5	mm	-
	$r_{a \max}$	1.5	mm	-
	$r_{al \max}$	1.5	mm	-
	r_{\min}	1.5	mm	-
	s	1.3	mm	距离中心位置的轴向偏移
说明		HJ308-E		型号, L 型圈

FAG NJ308-E-TVP2 + HJ308-E图片

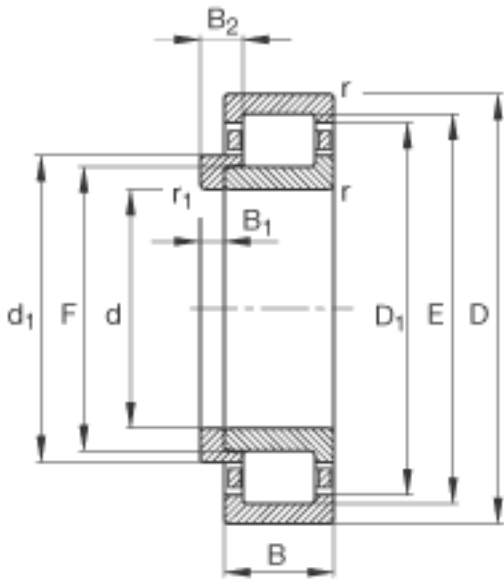

参考资料:<http://www.sozhou.com/p/9c86a6b2.html>

