


FAG NJ2222-E-TVP2 + HJ2222-E参数

尺寸	d	110	mm	-	
	D	200	mm	-	
	B	53	mm	-	
	B ₁	11	mm	-	
	B ₂	19.5	mm	-	
	D ₁	173.8	mm	-	
	D _{a max}	188	mm	-	
	d ₁	141.6	mm	-	
	d _{a max}	130	mm	-	
	d _{a min}	122	mm	-	
	d _{c min}	144	mm	-	
	E	180.5	mm	-	
	F	132.5	mm	-	
	r _{1 min}	2.1	mm	-	
	r _{a max}	2.1	mm	-	
	r _{al max}	2.1	mm	-	
	r _{min}	2.1	mm	-	
	s	4	mm	距离中心位置的轴向偏移	
	说明		HJ2222-E		型号, L 型圈
	重量	m	6890	g	质量
m ₁		647	g	质量, L 型圈	
基本额定载荷	C _r	455000	N	基本额定动载荷, 径向	
	C _{0r}	520000	N	基本额定静载荷, 径向	
极限转速	n _G	4100	r/min	极限转速	
参考转速	n _B	2800	r/min	参考速度	
疲劳极限载荷	C _{ur}	86000	N	疲劳极限载荷, 径向	

FAG NJ2222-E-TVP2 + HJ2222-E图片

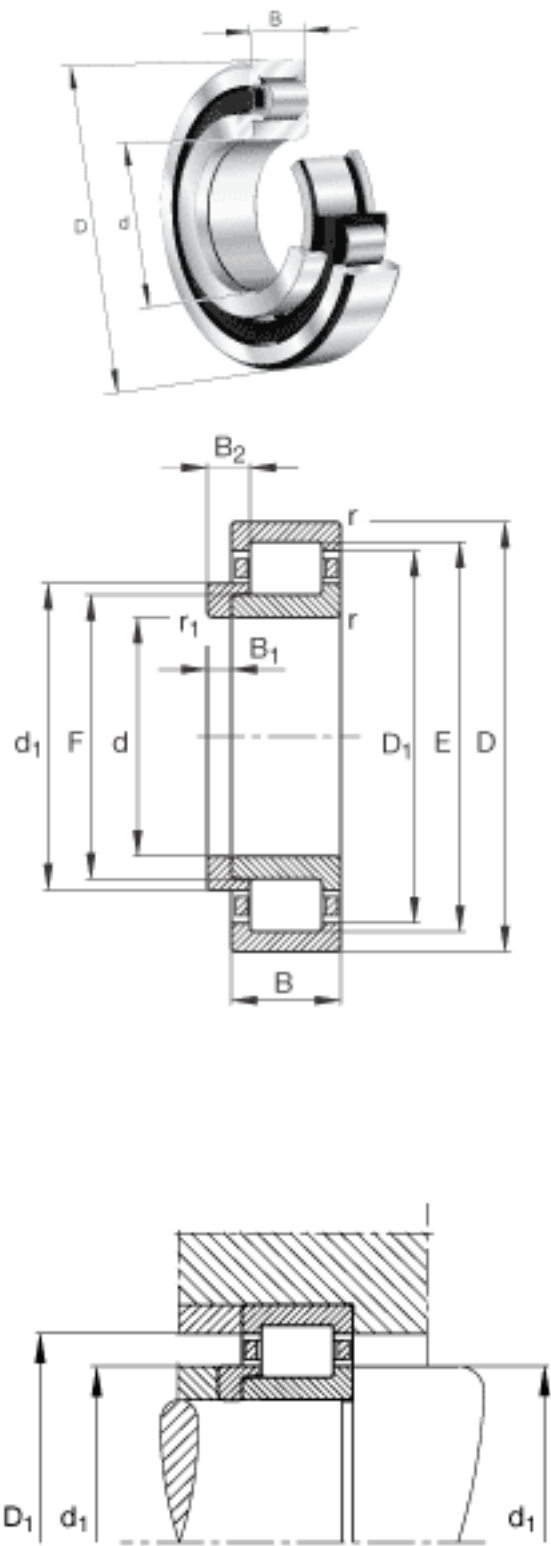

参考资料:<http://www.sozhou.com/p/9e6c90b6.html>

