


FAG 230SM630-MA参数

尺寸	d	630	mm	-
	D	980	mm	-
	C	230	mm	-
	B	355	mm	-
基本额定载荷	C_r	6400000	N	基本额定动载荷，径向
计算系数	e	0.22		-
	Y_1	3.01		-
	Y_2	4.48		-
基本额定载荷	C_{0r}	13700000	N	基本额定静载荷，径向
计算系数	Y_0	2.94		-
极限转速	n_G	219	r/min	极限转速
疲劳极限载荷	C_{ur}	950000	N	疲劳极限载荷，径向
轴向许用载荷	$F_{a \max}$	94200	N	轴向许用载荷，适用于 无轴向支撑的内圈
锁紧力矩	M_a	120	Nm	每个锁紧螺钉的锁紧力矩
说明		230/670K		型号，调心滚子轴承，非剖分
		H30/670HG		型号，紧定套
尺寸	D_a	0	mm	-
	D_s	865	mm	-
	d_2	735	mm	-
	d_b	0	mm	-
	r_{\min}	7.5	mm	-
重量	m	955000	g	质量

FAG 230SM630-MA图片

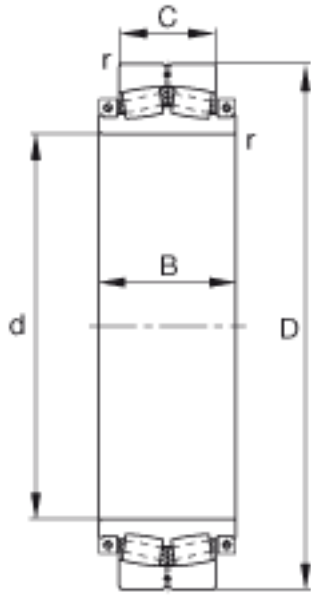

参考资料:<http://www.sozhou.com/p/a0a4380a.html>