


SKF BSA 307 C参数

主要尺寸	d	35	mm	-
	D	80	mm	-
	H	21	mm	-
基本额定载荷	C	57000	N	动载荷
	C_0	146000	N	静载荷
疲劳载荷极限	P_u	5400	N	-
可达转速	Grease lubrication	6700	r/min	-
	Oil-air lubrication	9500	r/min	-
重量	重量	560	g	-
型号	型号	BSA 307 C	-	-

SKF BSA 307 C图片

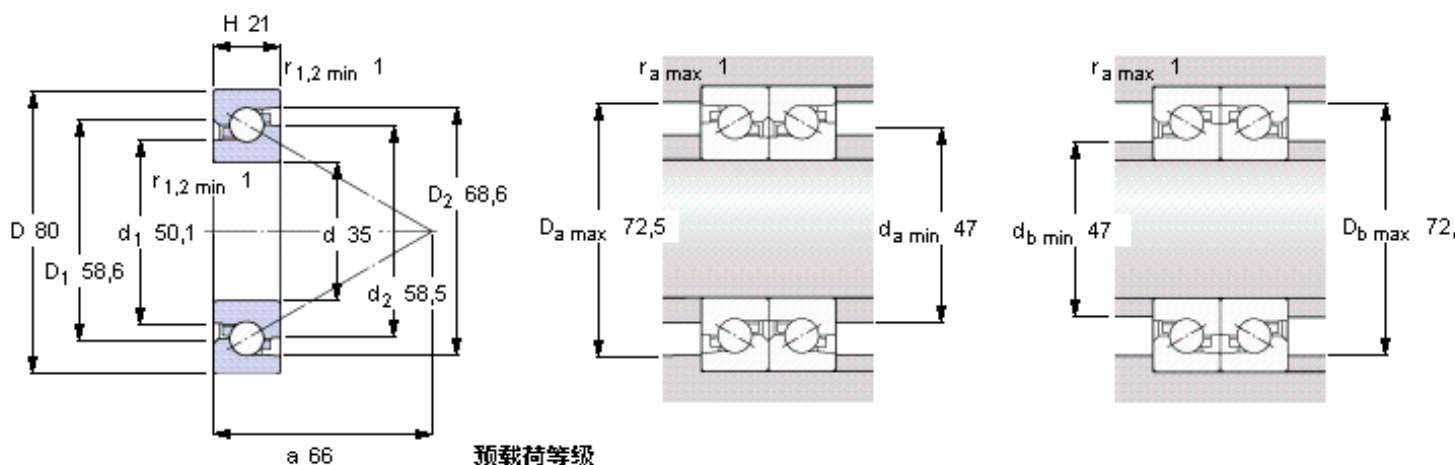

预载荷等级




	A	B
Preload ¹⁾ [N]	4100	8200
Frictional moment ¹⁾ [Nm] (guideline value)	0,26	0,46
Static axial stiffness ¹⁾ [N/μm] (guideline value)	1120	1430

Max. axial load carrying capacity
(guideline value)
65

Reference grease quantity [cm³]
 G_{ref} 4,2

¹⁾ Values apply to unmounted bearing set with two bearings arranged back-to-back or face-to-face

参考资料: <http://www.sozhou.com/p/a3eb94ef.html>

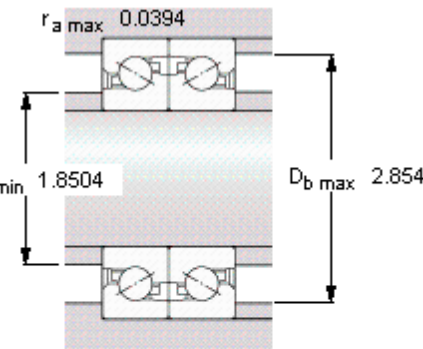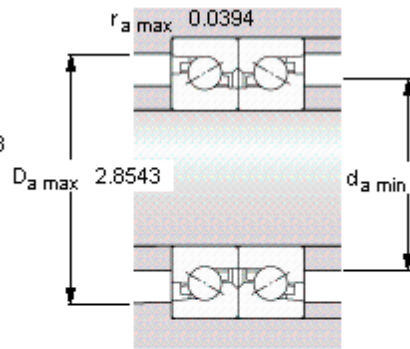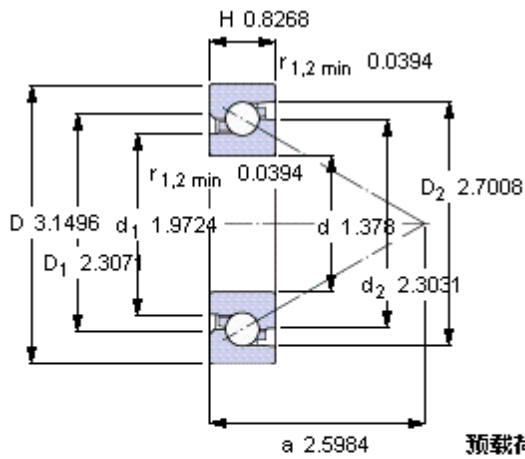

预载荷等级

Preload¹⁾ [N]

	A	B
Preload ¹⁾ [N]	4100	8200

Frictional moment¹⁾ [Nm]

(guideline value)

Frictional moment ¹⁾ [Nm]	0,26	0,46
--------------------------------------	------	------

Static axial stiffness¹⁾ [N/μm]

(guideline value)

Static axial stiffness ¹⁾ [N/μm]	1120	1430
---	------	------

Max. axial load carrying capacity

(guideline value)

65

Reference grease quantity [cm³]

G_{ref} 4,2

¹⁾ Values apply to unmounted bearing set with two bearings arranged back-to-back or face-to-face