
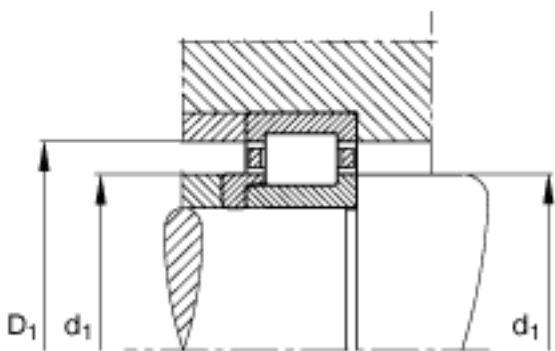


FAG NJ2228-E-M1 + HJ2228-E参数

极限转速	n_G	4250	r/min	极限转速	
参考转速	n_B	2080	r/min	参考速度	
疲劳极限载荷	C_{ur}	131000	N	疲劳极限载荷, 径向	
尺寸	d	140	mm	-	
	D	250	mm	-	
	B	68	mm	-	
	B_1	11	mm	-	
	B_2	23	mm	-	
	D_1	216.7	mm	-	
	$D_{a\ max}$	236	mm	-	
	d_1	179.4	mm	-	
	$d_{a\ max}$	166	mm	-	
	$d_{a\ min}$	154	mm	-	
	$d_{c\ min}$	182	mm	-	
	E	225	mm	-	
	F	169	mm	-	
	$r_{1\ min}$	3	mm	-	
	$r_{a\ max}$	2.5	mm	-	
	$r_{al\ max}$	2.5	mm	-	
	r_{min}	3	mm	-	
		s	7	mm	距离中心位置的轴向偏移
	说明		HJ2228-E		型号, L 型圈
重量	m	14700	g	质量	
	m_1	1080	g	质量, L 型圈	
基本额定载荷	C_r	670000	N	基本额定动载荷, 径向	
	C_{0r}	830000	N	基本额定静载荷, 径向	

FAG NJ2228-E-M1 + HJ2228-E图片

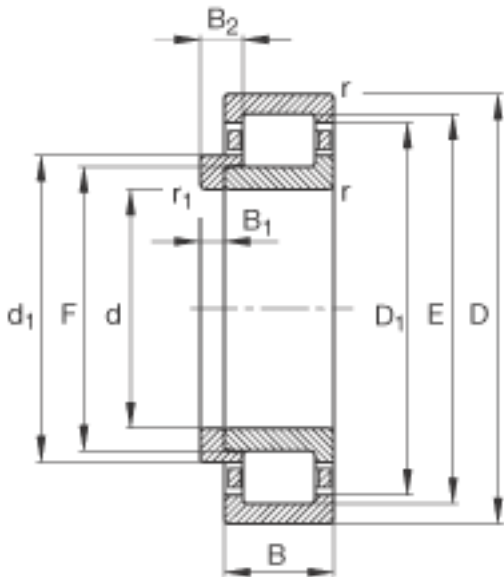

参考资料:<http://www.sozhou.com/p/ab6b39eb.html>

