


FAG NJ2217-E-TVP2 + HJ2217-E参数

尺寸	d	85	mm	-	
	D	150	mm	-	
	B	36	mm	-	
	B <sub>1</sub>	8	mm	-	
	B <sub>2</sub>	13	mm	-	
	D <sub>1</sub>	131.5	mm	-	
	D <sub>a max</sub>	139	mm	-	
	d <sub>1</sub>	107.5	mm	-	
	d <sub>a max</sub>	99	mm	-	
	d <sub>a min</sub>	96	mm	-	
	d <sub>c min</sub>	110	mm	-	
	E	136.5	mm	-	
	F	100.5	mm	-	
	r <sub>1 min</sub>	2	mm	-	
	r <sub>a max</sub>	2	mm	-	
	r <sub>al max</sub>	2	mm	-	
	r <sub>min</sub>	2	mm	-	
	s	1.3	mm	距离中心位置的轴向偏移	
	说明		HJ2217-E		型号, L 型圈
	重量	m	2550	g	质量
m <sub>1</sub>		249	g	质量, L 型圈	
基本额定载荷	C <sub>r</sub>	255000	N	基本额定动载荷, 径向	
	C <sub>0r</sub>	275000	N	基本额定静载荷, 径向	
极限转速	n <sub>G</sub>	5600	r/min	极限转速	
参考转速	n <sub>B</sub>	3350	r/min	参考速度	
疲劳极限载荷	C <sub>ur</sub>	48500	N	疲劳极限载荷, 径向	

FAG NJ2217-E-TVP2 + HJ2217-E图片

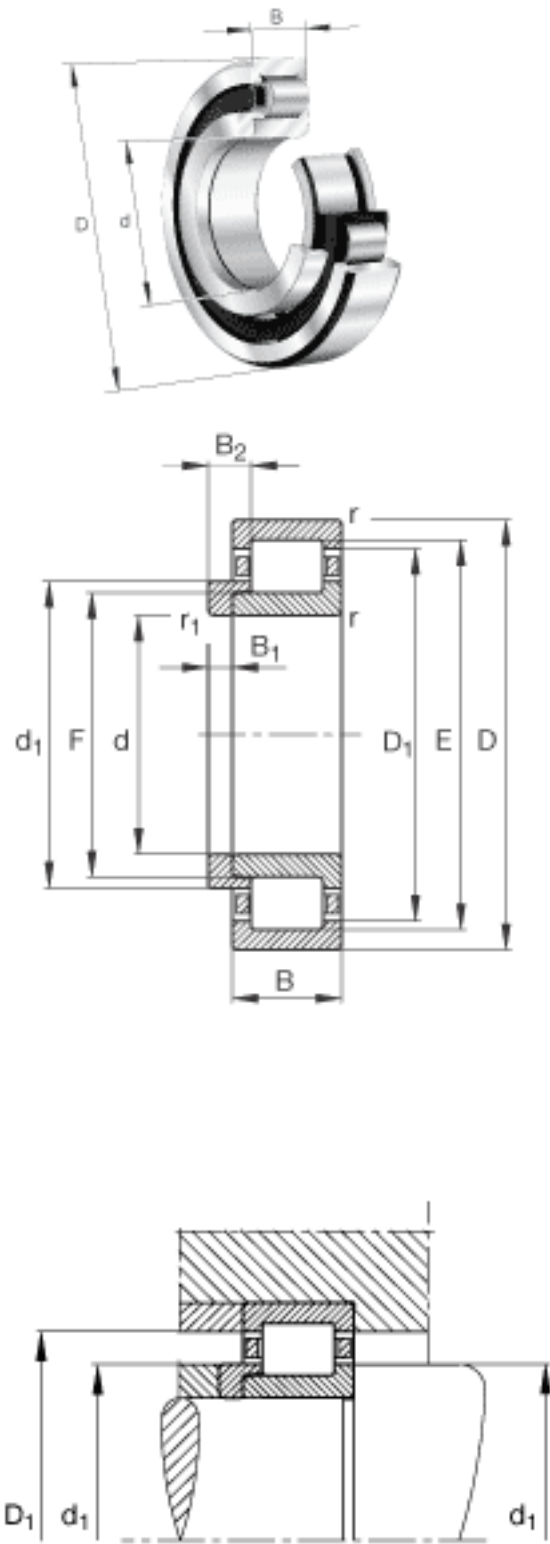

参考资料:<http://www.sozhou.com/p/abcbe53e.html>

