
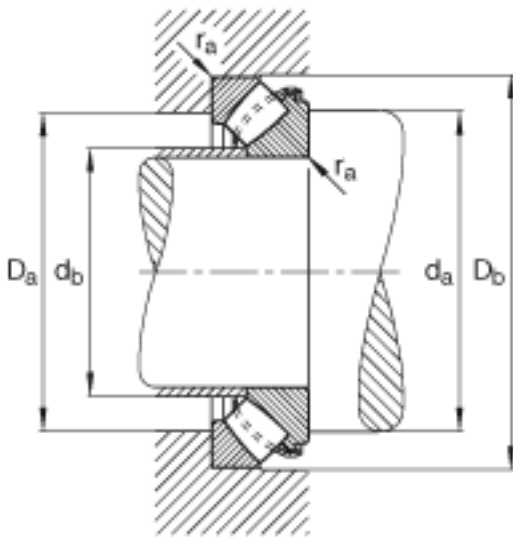


### FAG 29364-E1参数

尺寸	$r_{min}$	5	mm	-
	$D_1$	391	mm	-
	$D_{a\ max}$	449	mm	-
	$D_{b\ min}$	510	mm	-
	$d_1$	460	mm	-
	$d_{a\ min}$	405	mm	-
	$d_{b\ max}$	333	mm	-
	$d_{b1\ max}$	347	mm	-
	$r_{a\ max}$	4	mm	-
	$d$	320	mm	-
	$D$	500	mm	-
	$T$	109	mm	-
	$A$	180	mm	-
	$T_1$	53	mm	-
	$T_3$	68	mm	-
	$T_5$	96.6	mm	-
重量	$m$	72400	g	质量
基本额定载荷	$C_a$	3350000	N	基本额定动载荷, 轴向
	$C_{0a}$	11000000	N	基本额定静载荷, 轴向
极限转速	$n_G$	1260	r/min	极限转速
参考转速	$n_B$	640	r/min	参考速度
疲劳极限载荷	$C_{ua}$	1190000	N	疲劳极限载荷, 轴向

### FAG 29364-E1图片

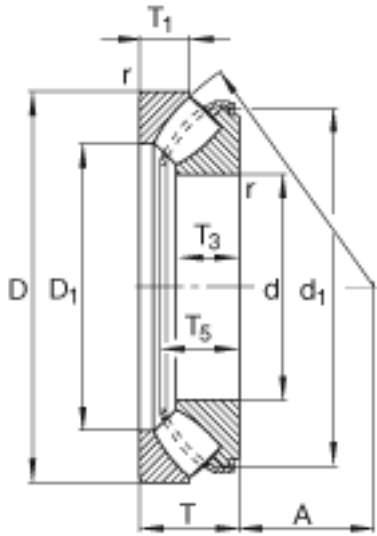

参考资料:<http://www.sozhou.com/p/b195e9df.html>

