


FAG 23976-K-MB + H3976参数

尺寸	$d_{1H}$	360	mm	-
	D	520	mm	-
	B	106	mm	-
	$B_{a \min}$	15	mm	-
	c	48	mm	-
	$c_1$	62	mm	-
	$D_1$	477.6	mm	-
	$D_{a \max}$	505.4	mm	-
	$D_m$	450	mm	-
	d	380	mm	-
	$d_{a \max}$	415	mm	-
	$d_{b \min}$	393	mm	-
	$d_s$	9.5	mm	-
	l	164	mm	-
	$n_s$	17.7	mm	-
	$r_{a \max}$	3	mm	-
	$r_{\min}$	4	mm	-
说明		H3976		质量, 紧定套
重量	m	66300	g	质量
	$m_1$	32100	g	质量, 紧定套
基本额定载荷	$C_r$	1760000	N	基本额定动载荷, 径向
极限转速	$n_G$	1340	r/min	极限转速
参考转速	$n_B$	760	r/min	参考速度
疲劳极限载荷	$C_{ur}$	265000	N	疲劳极限载荷, 径向
计算系数	e	0.19		-
	$Y_1$	3.58		-
	$Y_2$	5.33		-

基本额定载荷	$C_{0r}$	4000000	N	基本额定静载荷，径向
计算系数	$Y_0$	3.5		-

FAG 23976-K-MB + H3976图片

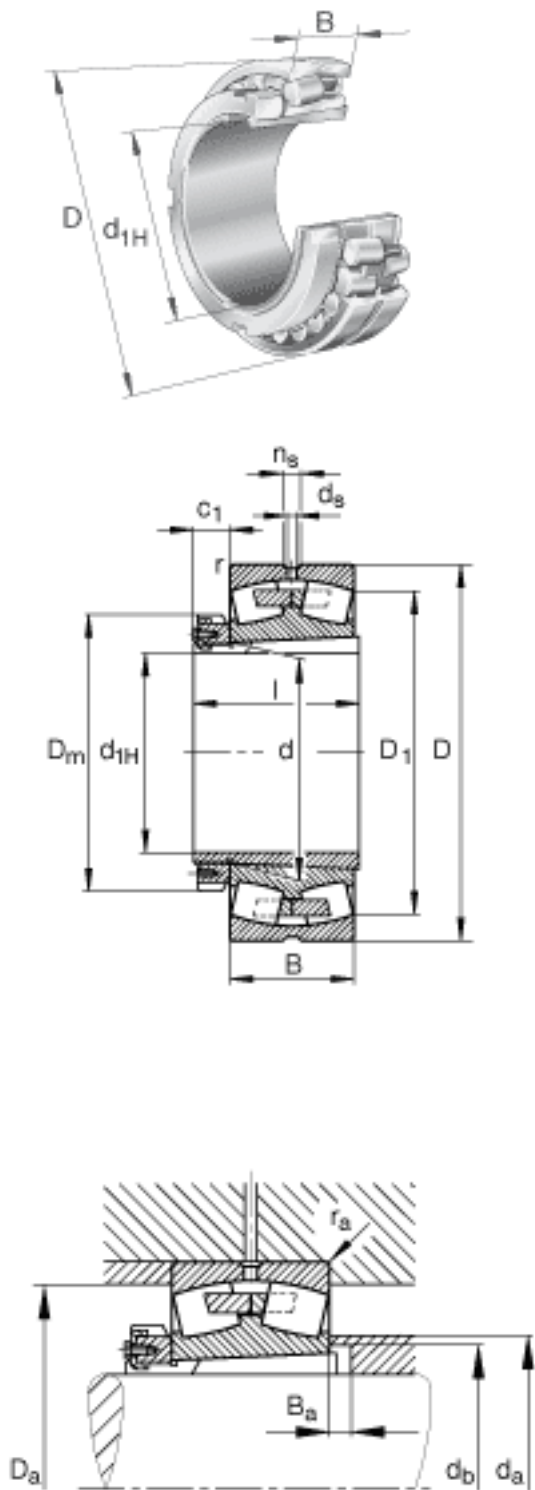

参考资料:<http://www.sozhou.com/p/b2639c8a.html>