

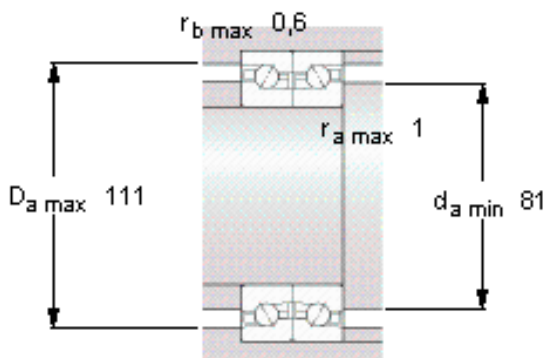


SKF BTM 75 ATN9/HCP4CDBB参数

| | | | | |
|--------|---------|----------------------|-------|-----|
| 主要尺寸 | d | 75 | mm | - |
| | D | 115 | mm | - |
| | H | 36 | mm | - |
| 基本额定载荷 | C | 27500 | N | 动载荷 |
| | C_0 | 61000 | N | 静载荷 |
| 疲劳载荷极限 | P_u | 2600 | N | - |
| 可达转速 | Grease | 7700 | r/min | - |
| | Oil-air | 9200 | r/min | - |
| 重量 | 重量 | 1200 | g | - |
| 型号 | 型号 | BTM 75 ATN9/HCP4CDBB | - | - |

SKF BTM 75 ATN9/HCP4CDBB图片

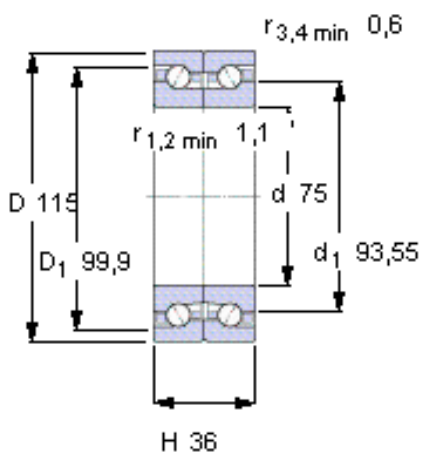

未安装时的预载荷 [N]

750

Reference grease quantity [cm³]




G_{ref} 11,8

Static axial stiffness [N/μm]

(guideline value)

393

参考资料: <http://www.sozhou.com/p/b4962101.html>

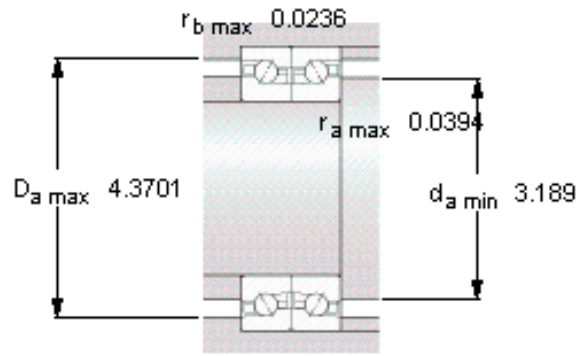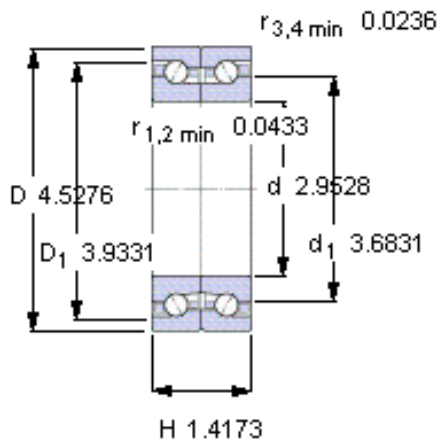

未安装时的预载荷 [N]

750

Reference grease quantity [cm³]

G_{ref} 11,8

Static axial stiffness [N/ μm]

(guideline value)

393