


FAG 241/670-B-K30-MB + AH241/670参数

尺寸	d_{1H}	630	mm	-
	D	1090	mm	-
	B	412	mm	-
	a	30	mm	-
	b	55	mm	-
	D_1	929.4	mm	-
	$D_{a\ max}$	1058	mm	-
	d	670	mm	-
	d_{2G}	Tr695x6		-
	$d_{a\ min}$	702	mm	-
	d_s	12.5	mm	-
	l	467	mm	-
	n_s	23.5	mm	-
	$r_{a\ max}$	6	mm	-
	r_{min}	7.5	mm	-
说明		AH241/670		型号, 退卸套
重量	m	1540000	g	质量
	m_1	183000	g	质量, 退卸套
基本额定载荷	C_r	14000000	N	基本额定动载荷, 径向
计算系数	e	0.37		-
	Y_1	1.83		-
	Y_2	2.72		-
基本额定载荷	C_{0r}	31500000	N	基本额定静载荷, 径向
计算系数	Y_0	1.79		-
极限转速	n_G	420	r/min	极限转速
参考转速	n_B	127	r/min	参考速度
疲劳极限载荷	C_{ur}	2110000	N	疲劳极限载荷, 径向

FAG 241/670-B-K30-MB + AH241/670图片

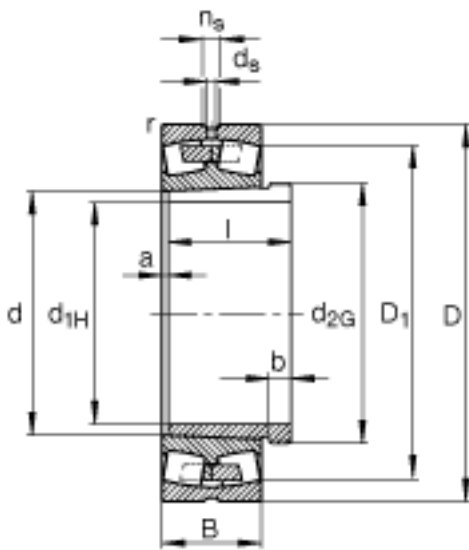

参考资料:<http://www.sozhou.com/p/c1b36f69.html>