


SKF BSA 203 C参数

主要尺寸	d	17	mm	-
	D	40	mm	-
	H	12	mm	-
基本额定载荷	C	16600	N	动载荷
	C_0	34500	N	静载荷
疲劳载荷极限	P_u	1270	N	-
可达转速	Grease lubrication	11000	r/min	-
	Oil-air lubrication	15000	r/min	-
重量	重量	78	g	-
型号	型号	BSA 203 C	-	-

SKF BSA 203 C图片

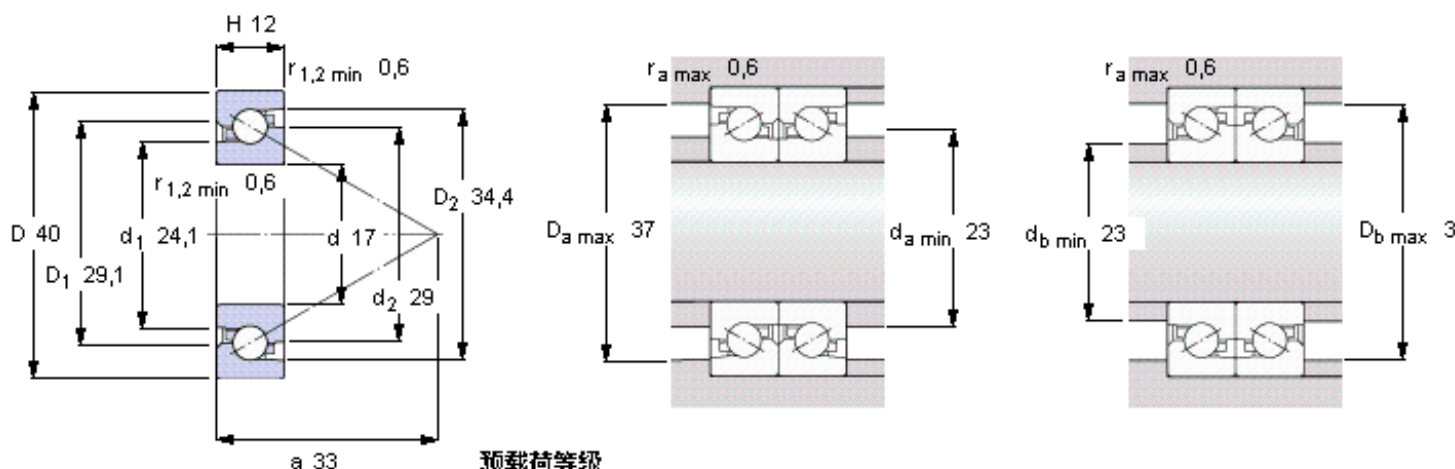

Preload¹⁾ [N]

Frictional moment¹⁾ [Nm]
(guideline value)

Static axial stiffness¹⁾ [N/μm]
(guideline value)

¹⁾ Values apply to unmounted bearing set with two bearings arranged back-to-back or face-to-face

预载荷等级

	A	B
Preload ¹⁾ [N]	1040	2080
Frictional moment ¹⁾ [Nm]	0,04	0,072

Static axial stiffness ¹⁾ [N/μm]	550	700
---	-----	-----




Max. axial load carrying capacity
(guideline value)

10,3

Reference grease quantity [cm³]

G_{ref} 0,5

参考资料: <http://www.sozhou.com/p/c3cdc34e.html>

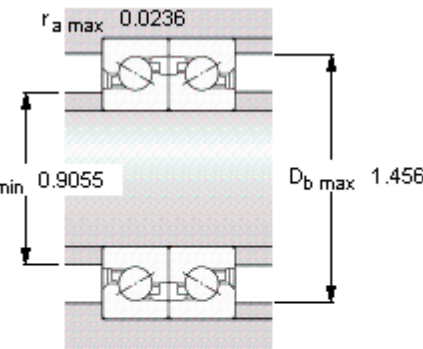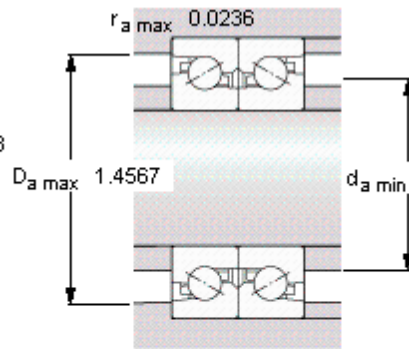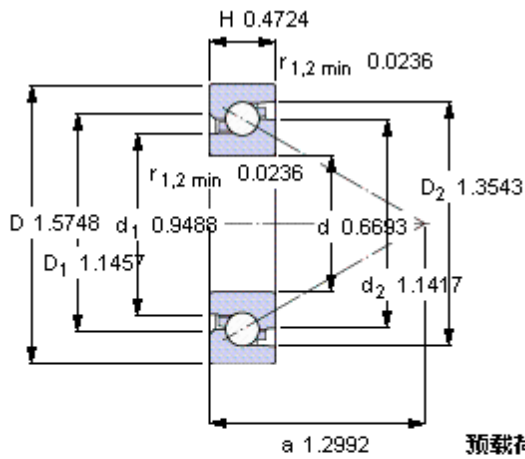

预载荷等级

Preload¹⁾ [N]

Frictional moment¹⁾ [Nm]

(guideline value)

Static axial stiffness¹⁾ [N/μm]

(guideline value)

	A	B
Preload ¹⁾ [N]	1040	2080
Frictional moment ¹⁾ [Nm]	0,04	0,072
Static axial stiffness ¹⁾ [N/μm]	550	700

Max. axial load carrying capacity

(guideline value)

10,3

Reference grease quantity [cm³]

G_{ref} 0,5

¹⁾ Values apply to unmounted bearing set with two bearings arranged back-to-back or face-to-face