

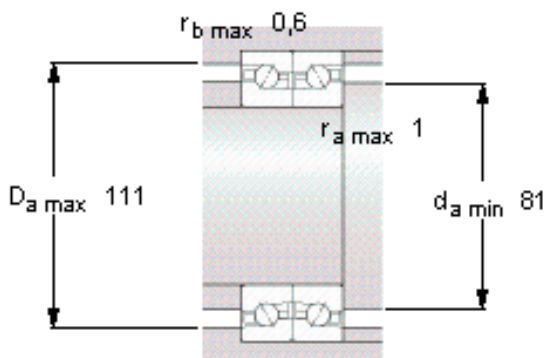


SKF BTM 75 ATN9/HCP4CDBA参数

主要尺寸	d	75	mm	-
	D	115	mm	-
	H	36	mm	-
基本额定载荷	C	27500	N	动载荷
	$C_0$	61000	N	静载荷
疲劳载荷极限	$P_u$	2600	N	-
可达转速	Grease	10300	r/min	-
	Oil-air	12300	r/min	-
重量	重量	1200	g	-
型号	型号	BTM 75 ATN9/HCP4CDBA	-	-

SKF BTM 75 ATN9/HCP4CDBA图片

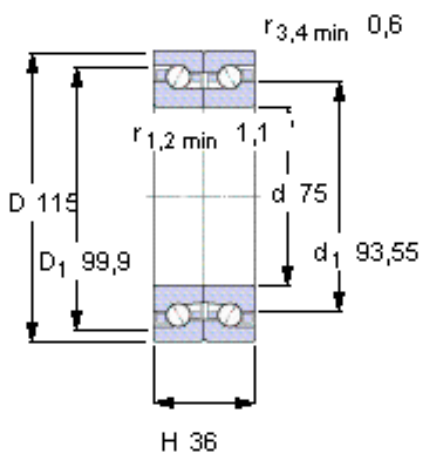

未安装时的预载荷 [N]

250

Reference grease quantity [cm<sup>3</sup>]




G<sub>ref</sub> 11,8

Static axial stiffness [N/μm]

(guideline value)

259

参考资料: <http://www.sozhou.com/p/d43c151c.html>

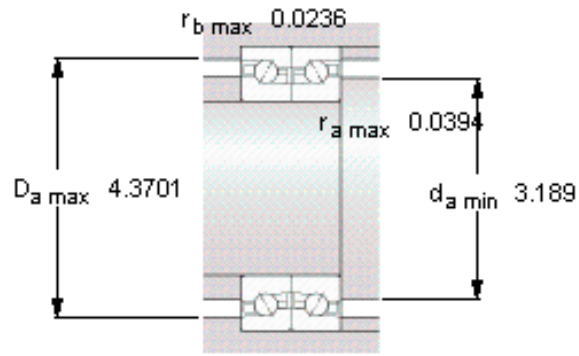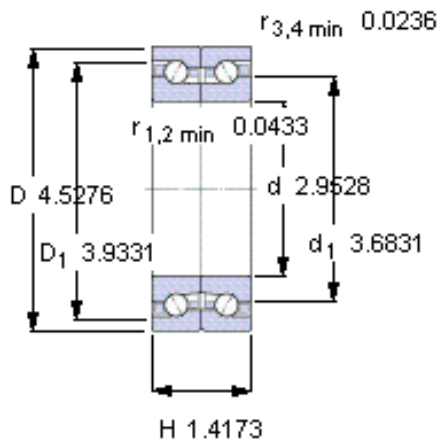

**未安装时的预载荷 [N]**

250

**Reference grease quantity [cm<sup>3</sup>]**

$G_{\text{ref}}$  11,8

**Static axial stiffness [N/ $\mu\text{m}$ ]**

(guideline value)

259