


SKF BSA 212 C参数

主要尺寸	d	60	mm	-
	D	110	mm	-
	H	22	mm	-
基本额定载荷	C	69500	N	动载荷
	C_0	216000	N	静载荷
疲劳载荷极限	P_u	8000	N	-
可达转速	Grease lubrication	5000	r/min	-
	Oil-air lubrication	6000	r/min	-
重量	重量	950	g	-
型号	型号	BSA 212 C	-	-

SKF BSA 212 C图片

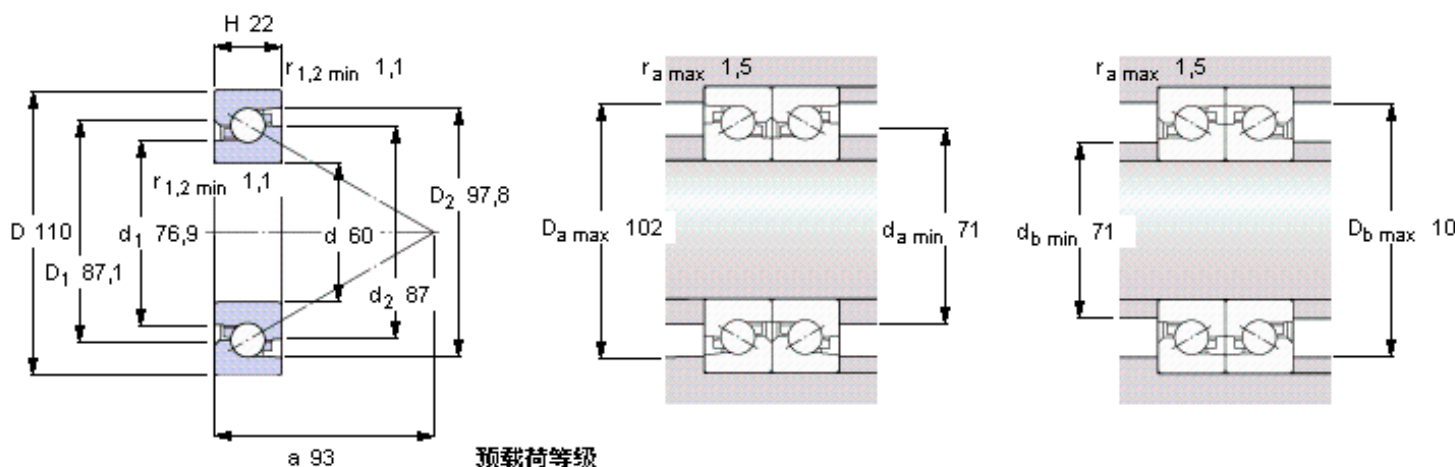

Preload¹⁾ [N]

Frictional moment¹⁾ [Nm]
(guideline value)

Static axial stiffness¹⁾ [N/μm]
(guideline value)

预载荷等级




	A	B
Preload ¹⁾ [N]	6050	12100
Frictional moment ¹⁾ [Nm] (guideline value)	0,54	1,05
Static axial stiffness ¹⁾ [N/μm] (guideline value)	1640	2080

Max. axial load carrying capacity
(guideline value)
65

Reference grease quantity [cm³]
 G_{ref} 8,5

¹⁾ Values apply to unmounted bearing set with two bearings arranged back-to-back or face-to-face

参考资料: <http://www.sozhou.com/p/d4662058.html>

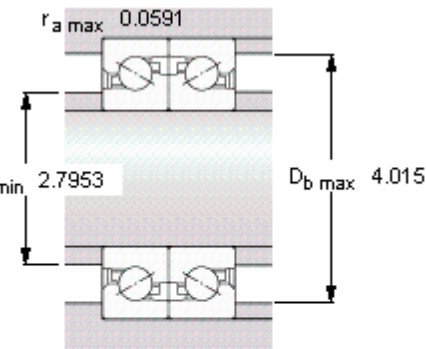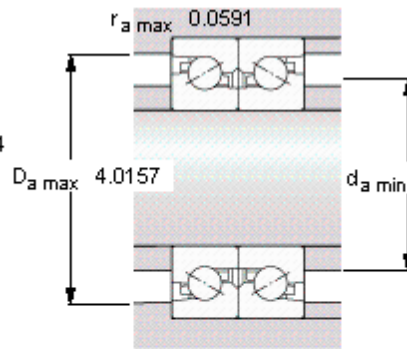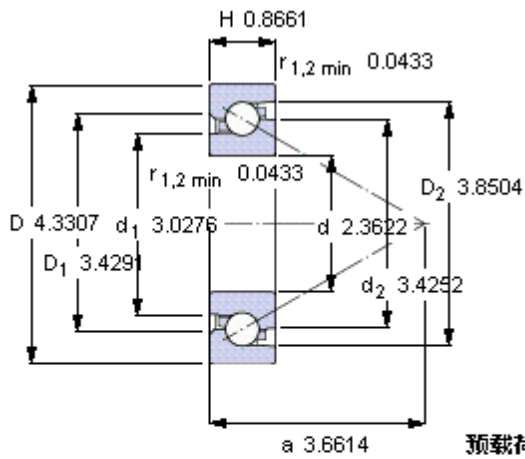

预载荷等级

Preload¹⁾ [N]

Frictional moment¹⁾ [Nm]

(guideline value)

Static axial stiffness¹⁾ [N/μm]

(guideline value)

	A	B
Preload ¹⁾ [N]	6050	12100
Frictional moment ¹⁾ [Nm]	0,54	1,05
Static axial stiffness ¹⁾ [N/μm]	1640	2080

Max. axial load carrying capacity

(guideline value)

65

Reference grease quantity [cm³]

G_{ref} 8,5

¹⁾ Values apply to unmounted bearing set with two bearings arranged back-to-back or face-to-face