


SKF BSD 4090 C参数

主要尺寸	d	40	mm	-
	D	90	mm	-
	H	20	mm	-
基本额定载荷	C	64000	N	动载荷
	C_0	170000	N	静载荷
疲劳载荷极限	P_u	6300	N	-
可达转速	Grease lubrication	6000	r/min	-
	Oil-air lubrication	7000	r/min	-
重量	重量	680	g	-
型号	型号	BSD 4090 C	-	-

SKF BSD 4090 C图片

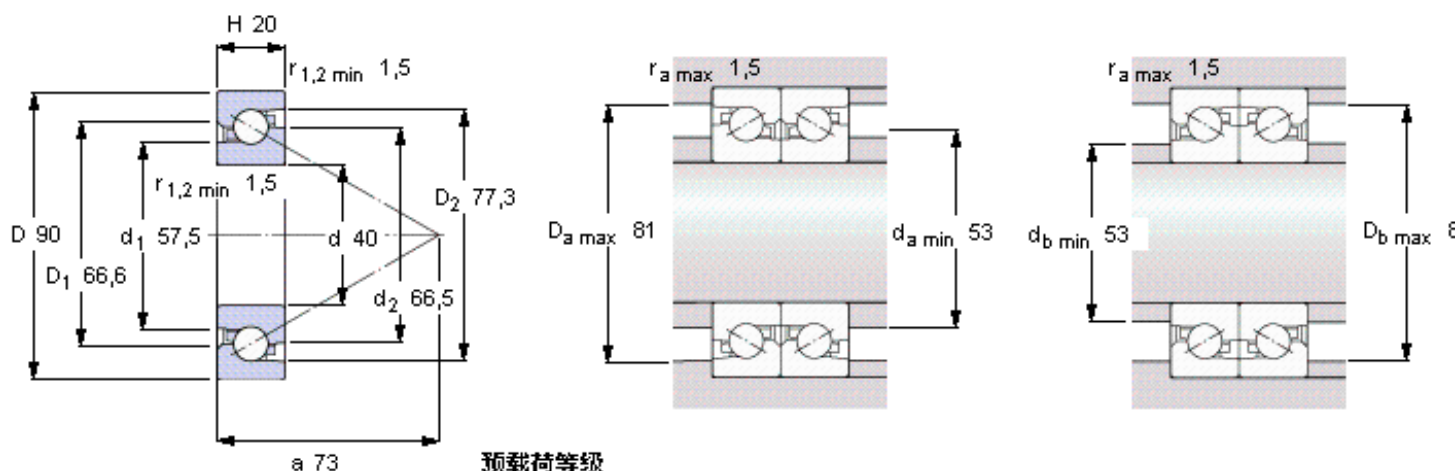

Preload¹⁾ [N]

Frictional moment¹⁾ [Nm]
(guideline value)

Static axial stiffness¹⁾ [N/μm]
(guideline value)

¹⁾ Values apply to unmounted bearing set with two bearings arranged back-to-back or face-to-face

预载荷等级

	A	B
Preload ¹⁾ [N]	5100	10200
Frictional moment ¹⁾ [Nm]	0,35	0,61
Static axial stiffness ¹⁾ [N/μm]	1340	1710




Max. axial load carrying capacity
(guideline value)

78,2

Reference grease quantity [cm³]

G_{ref} 5,2

参考资料: <http://www.sozhou.com/p/d4e87472.html>

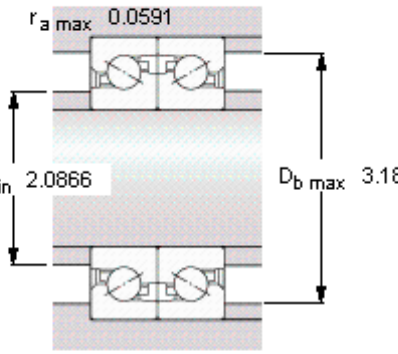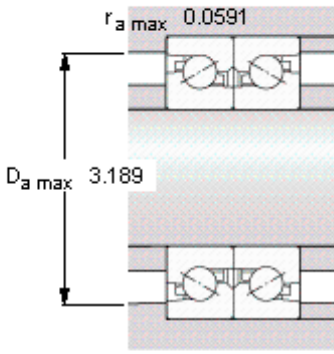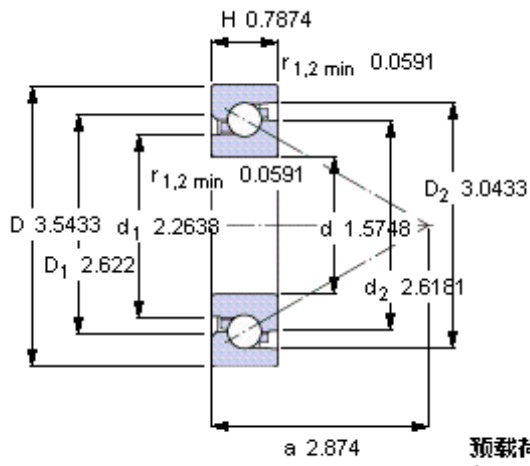

预载荷等级

	A	B
Preload¹⁾ [N]	5100	10200
Frictional moment¹⁾ [Nm] (guideline value)	0,35	0,61
Static axial stiffness¹⁾ [N/μm] (guideline value)	1340	1710

Max. axial load carrying capacity (guideline value)	78,2
Reference grease quantity [cm³] G _{ref}	5,2

¹⁾ Values apply to unmounted bearing set with two bearings arranged back-to-back or face-to-face