


FAG NJ2213-E-TVP2 + HJ2213-E参数

尺寸	d	65	mm	-	
	D	120	mm	-	
	B	31	mm	-	
	B ₁	6	mm	-	
	B ₂	10.5	mm	-	
	D ₁	104.3	mm	-	
	D _{a max}	111	mm	-	
	d ₁	84.4	mm	-	
	d _{a max}	77	mm	-	
	d _{a min}	74	mm	-	
	d _{c min}	87	mm	-	
	E	108.5	mm	-	
	F	78.5	mm	-	
	r _{1 min}	1.5	mm	-	
	r _{a max}	1.5	mm	-	
	r _{al max}	1.5	mm	-	
	r _{min}	1.5	mm	-	
	s	1.9	mm	距离中心位置的轴向偏移	
	说明		HJ2213-E		型号, L 型圈
	重量	m	1460	g	质量
m ₁		130	g	质量, L 型圈	
基本额定载荷	C _r	177000	N	基本额定动载荷, 径向	
	C _{0r}	182000	N	基本额定静载荷, 径向	
极限转速	n _G	7100	r/min	极限转速	
参考转速	n _B	4150	r/min	参考速度	
疲劳极限载荷	C _{ur}	33000	N	疲劳极限载荷, 径向	

FAG NJ2213-E-TVP2 + HJ2213-E图片

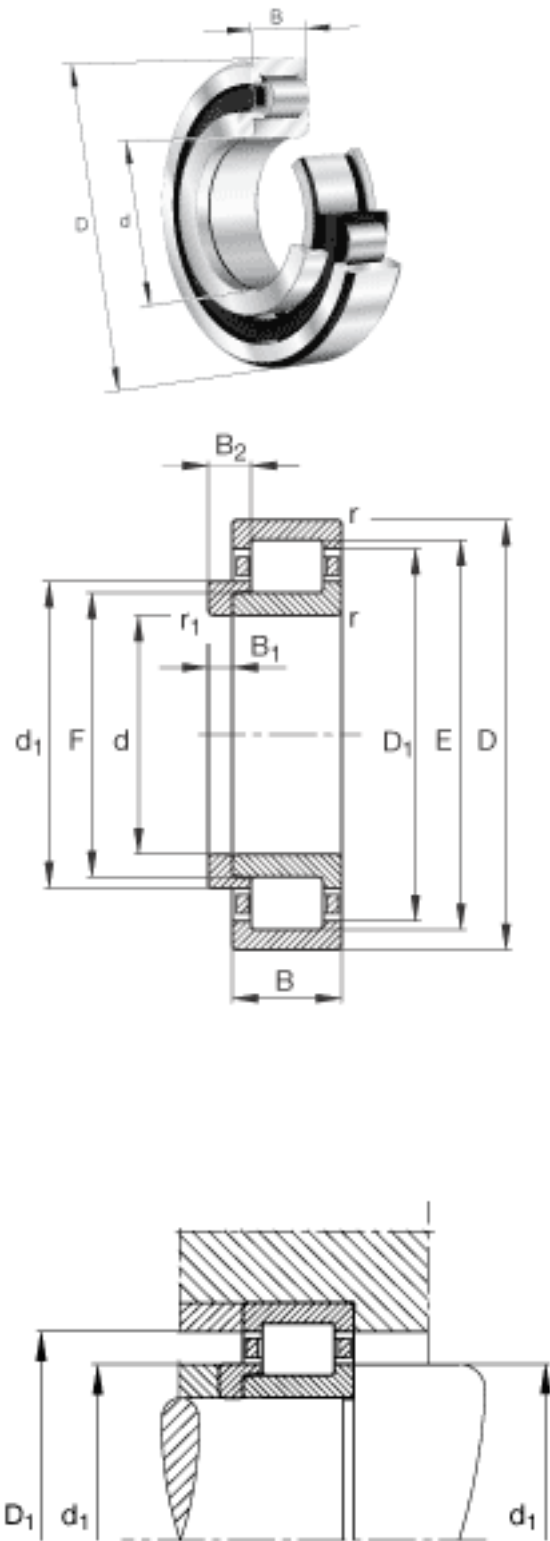

参考资料:<http://www.sozhou.com/p/d698bace.html>

