

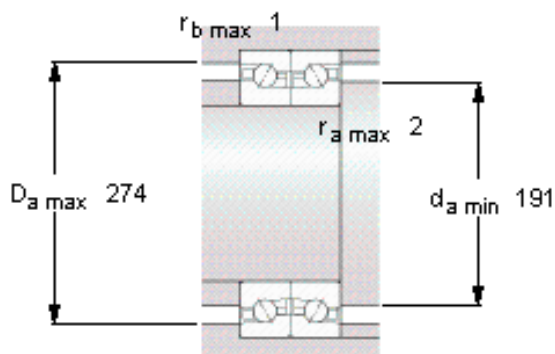


### SKF BTM 180 BM/HCP4CDBB参数

主要尺寸	d	180	mm	-
	D	280	mm	-
	H	90	mm	-
基本额定载荷	C	163000	N	动载荷
	$C_0$	425000	N	静载荷
疲劳载荷极限	$P_u$	11800	N	-
可达转速	Grease	2700	r/min	-
	Oil-air	3200	r/min	-
重量	重量	20000	g	-
型号	型号	BTM 180 BM/HCP4CDBB	-	-

### SKF BTM 180 BM/HCP4CDBB图片

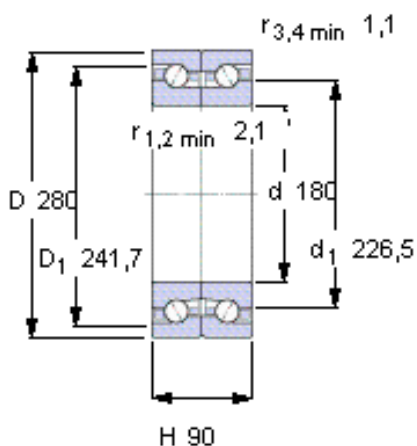

#### 未安装时的预载荷 [N]

6300

#### Reference grease quantity [cm<sup>3</sup>]




$G_{\text{ref}}$  160

#### Static axial stiffness [N/ $\mu\text{m}$ ]

(guideline value)

1669

参考资料:<http://www.sozhou.com/p/d9ecd21c.html>

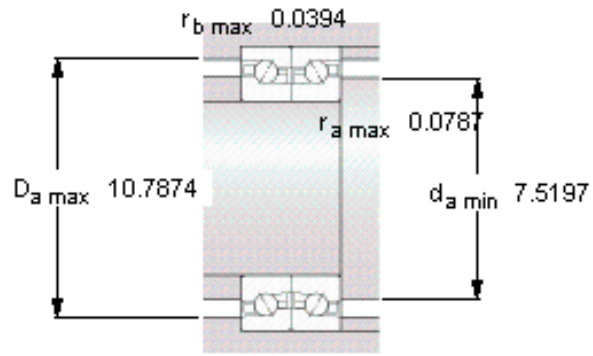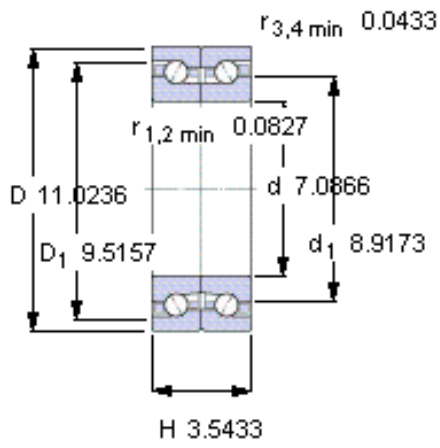

**未安装时的预载荷 [N]**

6300

**Reference grease quantity [cm<sup>3</sup>]**

$G_{\text{ref}}$  160

**Static axial stiffness [N/ $\mu\text{m}$ ]**

(guideline value)

1669