
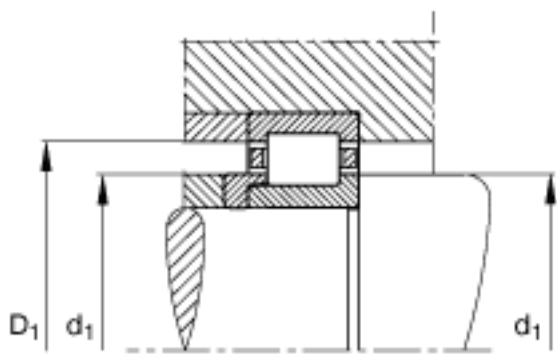


FAG NJ2230-E-M1 + HJ2230-E参数

尺寸	d	150	mm	-
	D	270	mm	-
	B	73	mm	-
	B <sub>1</sub>	12	mm	-
	B <sub>2</sub>	24.5	mm	-
	D <sub>1</sub>	233.2	mm	-
	D <sub>a max</sub>	256	mm	-
	d <sub>1</sub>	193.1	mm	-
	d <sub>a max</sub>	179	mm	-
	d <sub>a min</sub>	164	mm	-
	d <sub>c min</sub>	196	mm	-
	E	242	mm	-
	F	182	mm	-
	r <sub>1 min</sub>	3	mm	-
	r <sub>a max</sub>	2.5	mm	-
	r <sub>al max</sub>	2.5	mm	-
	r <sub>min</sub>	3	mm	-
极限转速	n <sub>G</sub>	3950	r/min	极限转速
参考转速	n <sub>B</sub>	1870	r/min	参考速度
疲劳极限载荷	C <sub>ur</sub>	152000	N	疲劳极限载荷，径向
说明		HJ2230-E		型号，L 型圈
重量	m <sub>1</sub>	1360	g	质量，L 型圈
	m	18900	g	质量
基本额定载荷	C <sub>r</sub>	780000	N	基本额定动载荷，径向
	C <sub>0r</sub>	970000	N	基本额定静载荷，径向
尺寸	s	7.5	mm	距离中心位置的轴向偏移

FAG NJ2230-E-M1 + HJ2230-E图片

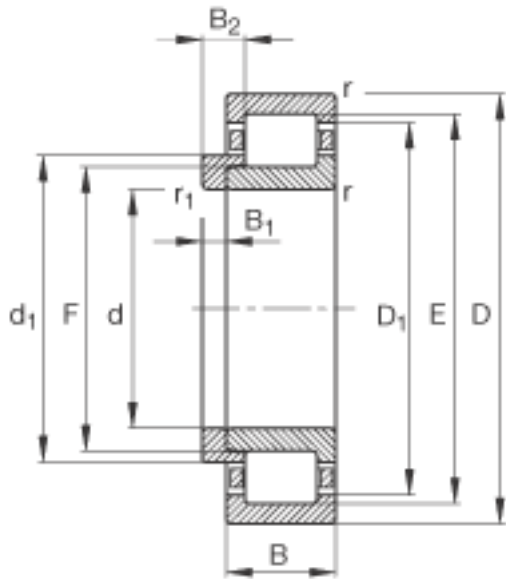

参考资料:<http://www.sozhou.com/p/ec6ee16c.html>

