


FAG 23276-B-K-MB + H3276参数

尺寸	d_{1H}	360	mm	-
	D	680	mm	-
	B	240	mm	-
	$B_{a \min}$	15	mm	-
	c	60	mm	-
	c_1	75	mm	-
	D_1	576.4	mm	-
	$D_{a \max}$	654	mm	-
	D_m	490	mm	-
	d	380	mm	-
	$d_{a \max}$	447	mm	-
	$d_{b \min}$	405	mm	-
	d_s	12.5	mm	-
	l	310	mm	-
	n_s	23.5	mm	-
	$r_{a \max}$	5	mm	-
	r_{\min}	6	mm	-
说明		H3276		质量, 紧定套
重量	m	367000	g	质量
	m_1	70700	g	质量, 紧定套
基本额定载荷	C_r	5300000	N	基本额定动载荷, 径向
计算系数	e	0.37		-
	Y_1	1.8		-
	Y_2	2.69		-
基本额定载荷	C_{0r}	9800000	N	基本额定静载荷, 径向
计算系数	Y_0	1.76		-
极限转速	n_G	880	r/min	极限转速

参考转速	n_B	400	r/min	参考速度
疲劳极限载荷	C_{ur}	780000	N	疲劳极限载荷，径向

FAG 23276-B-K-MB + H3276图片

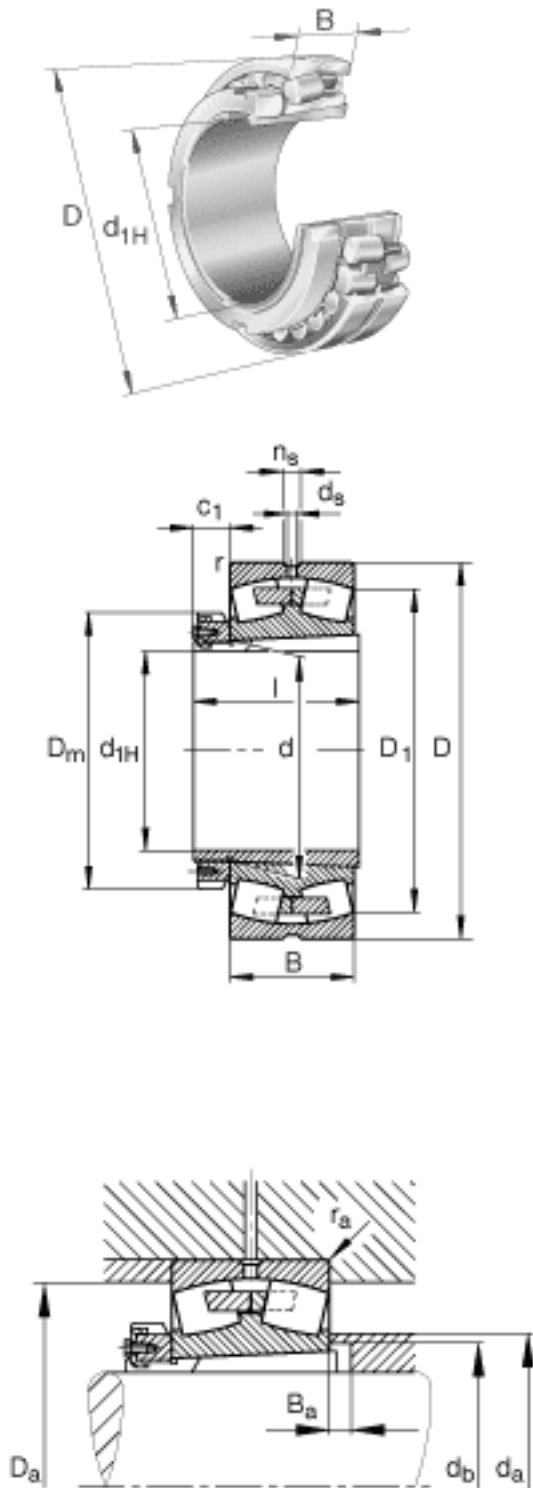

参考资料:<http://www.sozhou.com/p/eca4d54e.html>