


## NSK 54409U参数

|        |        |        |        |      |      |
|--------|--------|--------|--------|------|------|
| 基本额定载荷 | CA     | 13000  | kgf    | 动载荷  |      |
|        | COA    | 25100  | kgf    | 静载荷  |      |
| 极限转速   | GRE    | 1500   | 1/min  | 脂润滑  |      |
|        | OIL    | 2200   | 1/min  | 油润滑  |      |
| 尺寸     | SD3    | 100.0  | mm     | -    |      |
|        | D1     | 47     | mm     | -    |      |
|        | D2     | 72     | mm     | -    |      |
|        | D3     | 105    | mm     | -    |      |
|        | T2     | 44.5   | mm     | -    |      |
|        | T6     | 47.9   | mm     | -    |      |
|        | T8     | 51.5   | mm     | -    |      |
|        | B      | 17     | mm     | -    |      |
|        | SB     | 12.5   | mm     | -    |      |
|        | A1     | 23.5   | mm     | -    |      |
|        | R      | 80     | mm     | -    |      |
|        | 安装尺寸   | DA     | 72     | mm   | (最大) |
|        |        | SRA    | 1.0    | mm   | (最大) |
| SRB    |        | 0.6    | mm     | (最大) |      |
| 重量     | MASS   | 3530   | g      | 重量   |      |
| 型号     | 型号     | 54409U |        | -    |      |
| 外形尺寸   | SD2    | 35     | mm     | 内径   |      |
|        | SD     | 45     | mm     | 外径   |      |
|        | D      | 100    | mm     | 宽度   |      |
|        | T1     | 72     | mm     | -    |      |
|        | T5     | 78.8   | mm     | -    |      |
|        | T7     | 86     | mm     | -    |      |
|        | SR     | 1.1    | mm     | (最小) |      |
|        | SR1    | 0.6    | mm     | (最小) |      |
|        | 基本额定载荷 | CAN    | 128000 | N    | 动载荷  |
| COAN   |        | 246000 | N      | 静载荷  |      |

## NSK 54409U图片

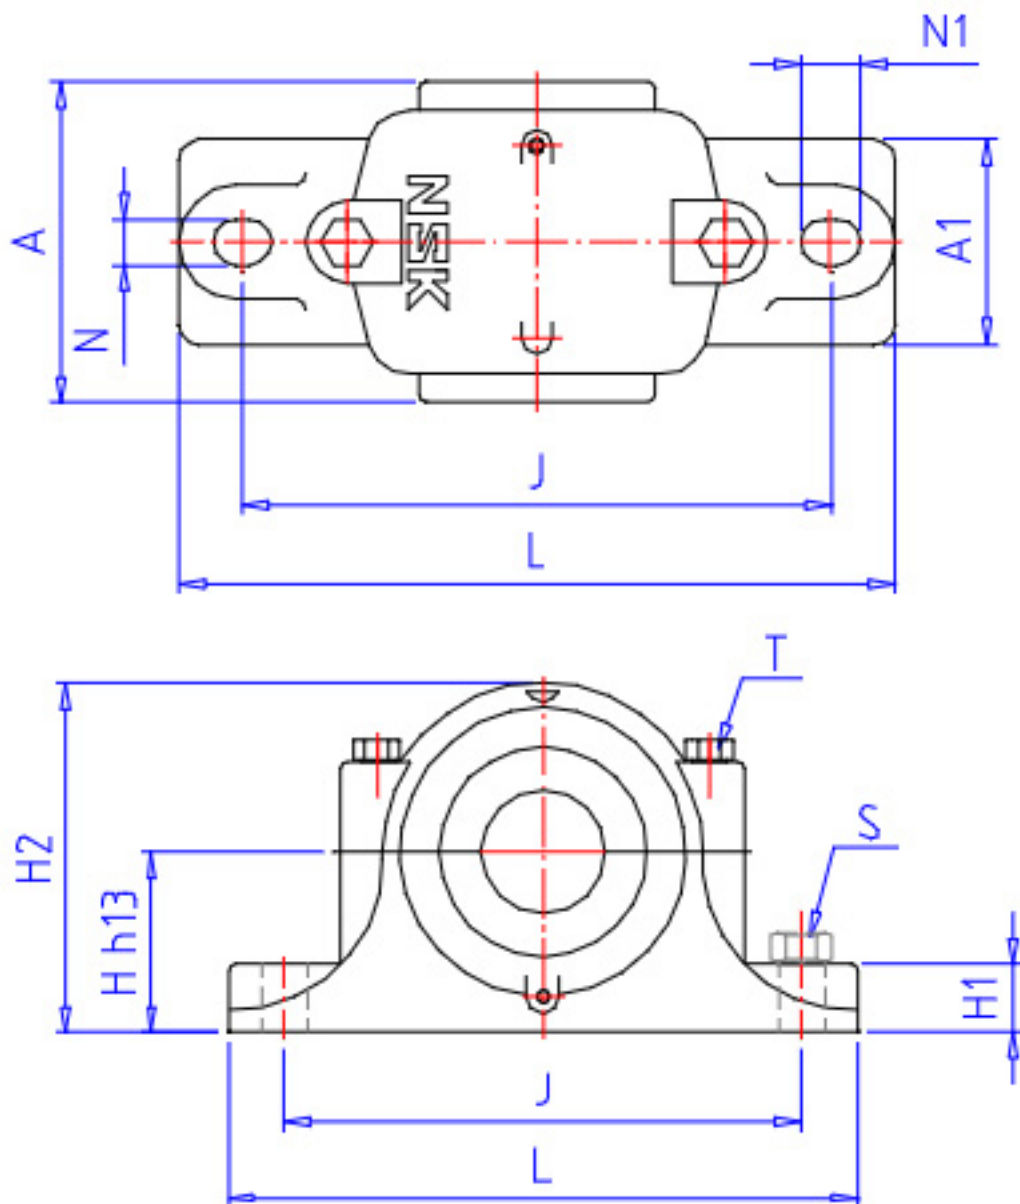

参考资料:<http://www.sozhou.com/p/f16a8233.html>

